

# UNDER CABINET LIGHTING

## APEX RECESSED PROFILE

Control: Decora Bluetooth Wall Dimmer



### POWER SUPPLY INSTALLATION: PLUG-IN OR HARDWIRE

- Apex profile, available in two lengths: 78 3/4" (2 m) L and 118 1/8" (3 m) L, can be cut easily with a miter saw.
- Apex profile dimensions: 3/8" (9 mm) W x 7/16" (10.5 mm) H.
- FlexyLED HE6 PW is a LED strip with 280 LED/m on a circuit 1/4" (6 mm) W.
- FlexyLED HE6 PW available in fixed lengths (trimmable): 19 11/16" (500 mm), 39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm), 98 7/16" (3000 mm).
- Kits recommended for a 96" counter.
- 78" power cable is pre-wired to the FlexyLED HE6 PW.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Power supply features optional plug-in installation with detachable power cable.\*

### STARTER KIT

Order the quantities below for each part number to complete 1 kit shown in the installation layout.



Qty.	No.	Description
4	16612419	FlexyLED HE6 PW, 4000 K warm white, 19 11/16" (500 mm) length, 5W, 24V
1	3055379	Apex recessed profile, 78 3/4" length, polycarbonate
4	3055304	Apex end caps, polycarbonate, 2-pack
1	DH2424	Dimmable power supply, 24W, 24V plug-in or hardwire
1	109D00101	Decora bluetooth digital dimmer with white, ivory and light almond face plates
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

### LED



Apex profile

FlexyLED HE6 PW

### POWER SUPPLY




Dimmable power supply

### CONTROL

Decora bluetooth wall dimmer




Face plate finishes, included



White Light Almond Ivory

### INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

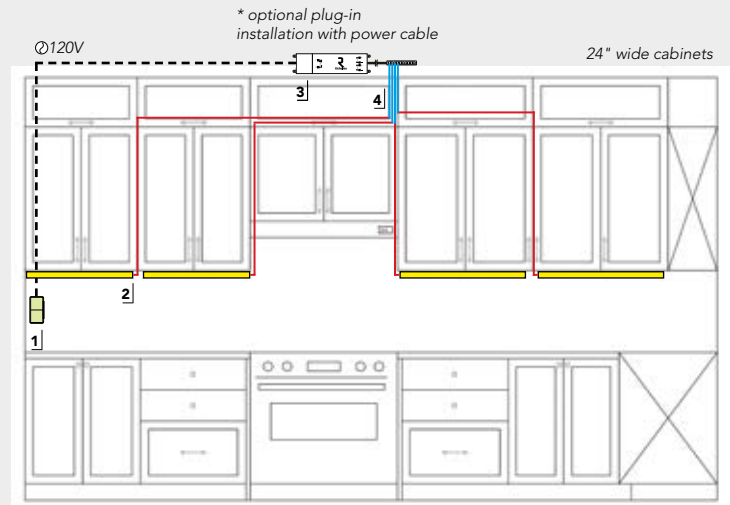

- Decora dimmer, 109D00101.
- Apex profile, 3055379 and FlexyLED HE6 PW, 16612419.
- Power supply, DH2424.
- Extension cable, 247901562.

----- 120V wire supplied by others