Accuride


# MODEL 3832E, 3834E +Cam

DRAWER ADJUST Vertical Drawer Adjustment Cam 32 mm System Box Drawer Slide Up To 100 lb. [45.5] Capacity•

APPLICATIONS: For use in wood pedestals, dresser and desk drawers, casework, residential and kitchen cabinetry. Not intended for lateral file drawer applications.<sup>‡</sup> Use for side mount only. This product is covered by U.S. (5,980,007), (488,712) and various foreign patents issued and/or pending.

3832E, 3834E QUICK REFERENCE

Side Space: (.50" + 0.031) x 2 Length: 3832E-6"-28" 3834E-12"-28" Height: 1.80" Load: 100 lbs.•

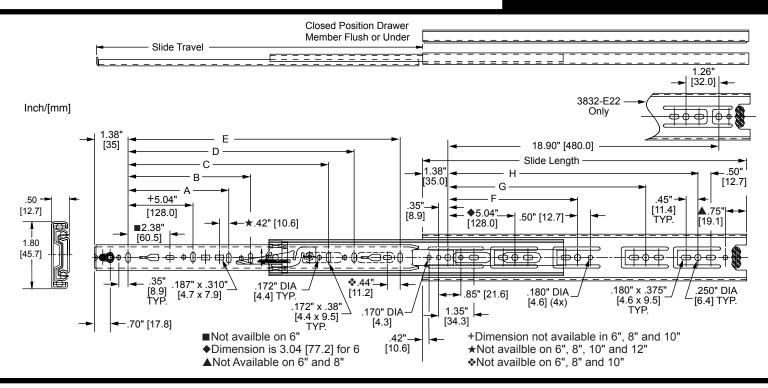

Finishes	3832E: Bright electro-zinc (C), black zinc (CB), white electrocoating (EW), H-coat (CH) 3832 only	Part Number	Slide Length		Travel 3834
	3834E: Bright electro-zinc (C), black zinc (CB)	3832-E6	5.84 [148]	5.42 [138]	
Length	3832E: 6"–28" [140 mm–700 mm] 3834E: 12"–28" [300 mm–700 mm]	3832-E8	7.84 [199]	8.00 [203]	
Travel	3832E: Full extension 3834E: 1" Over travel	3832-E10	9.84 [250]	10.00 [254]	
Height	1.80" [45.7 mm]	3832-E12 3834-E12	11.81 [300]	12.00 [305]	13.00 [330]
Load	100 lbs. [45.5kg.] •	3832-E14	13.78	14.00	15.00
Side Space	1/2" + 1/32" / -0.0 [12.7 mm +.8 / -0.0]	3832-E14	[350]	[356]	[381]
Disconnect	Front, handed lever	3832-E16 3834-E16	15.75 [400]	16.00 [406]	17.00 [432]
Mounting	Side, optional rear brackets for face frame installation	3832-E18 3834-E18	17.72 [450]	18.00 [457]	19.00 [483]
Hardware	Flat head 6 mm Euro System screw or #8 pan head screw, stainless steel screws for (CH) finish only.	3832-E20 3834-E20	19.69 [500]	20.00 [508]	21.00 [533]
Ball	C & CB finish: Steel	3832-E22 3834-E22	21.65	22.00	23.00
Bearings	EW finish: Acetal polymer in drawer member CH finish: Stainless steel	3832-E24 3834-E24	[550] 23.62 [600]	[559] 24.00 [610]	[584] 25.00 [635]
Features	Drawer member vertical adjustment cam, hold-in detent; silenced open and closed; 32 mm spacing on cabinet member holes	3832-E26 3834-E26	25.59 [650]	26.00 [660]	27.00 [686]
Optional Weather	Electro-zinc plating with H-coat overcoat provides 8 times more protection for installations	3832-E28 3834-E28	27.56 [700]	28.00 [711]	29.00 [737]
Resistant Finish (CH) 3832 only	subjected to indirect weather conditions. Includes stainless steel ball retainer and rivets.		‡ ▲ ◇	Not a Not a	eral file d available available rating b

Part Number	Slide Length	Slide 3832	Travel 3834	Α	в	с	D	Е	F	G	Н
3832-E6	5.84 [148]	5.42 [138]						3.78 [96]			
3832-E8	7.84 [199]	8.00 [203]						5.56 [141]			
3832-E10	9.84 [250]	10.00 [254]						7.56 [192]			
3832-E12 3834-E12	11.81 [300]	12.00 [305]	13.00 [330]					9.52 [242]	8.82 [224]		
3832-E14 3832-E14	13.78 [350]	14.00 [356]	15.00 [381]					11.50 [292]	8.82 [224]		
3832-E16 3834-E16	15.75 [400]	16.00 [406]	17.00 [432]					13.47 [342]	8.82 [224]	12.60 [320]	
3832-E18 3834-E18	17.72 [450]	18.00 [457]	19.00 [483]			12.60 [320]		15.43 [392]		13.86 [352]	
3832-E20 3834-E20	19.69 [500]	20.00 [508]	21.00 [533]			▲12.60 [320]		17.40 [442]	8.82 [224]	16.38 [416]	
3832-E22 3834-E22	21.65 [550]	22.00 [559]	23.00 [584]			▲12.60 [320]	16.38 [416]			13.86 [352]	
3832-E24 3834-E24	23.62 [600]	24.00 [610]	25.00 [635]	8.82 [224]		16.38 [416]		21.34 [542]		13.86 [352]	
3832-E26 3834-E26	25.59 [650]	26.00 [660]	27.00 [686]	8.82 [224]		16.38 [416]	21.42 [544]			13.86 [352]	
3832-E28 3834-E28	27.56 [700]	28.00 [711]	29.00 [737]	8.82 [224]	◊11.34 [288]	▲16.38 [416]		25.28 [642]		13.86 [352]	

drawer is wider than it is deep

e on 3834 version

e on 3832-28 version

based on a 22" slide mounted in a 24" wide drawer cycled 50,000 times. (Meets AWI and BHMA standards.)


# **Installation Instructions**


#### Install Cabinet Member

- 1. Separate slide members by lifting up the left hand disconnect lever and pushing down the right hand lever.
- Install cabinet (large) member first. For applications with an overlay drawer front, refer to Figure 1 for conventional mounting and Figure 2 for 32 mm system mounting. For applications with an inset drawer front, set the slide back the thickness of the drawer front plus 1/8" [3.2 mm].


#### **Install Drawer Member**

3. Install the drawer member with a screw through the cam adjuster and through a hole or slot at the rear.






- 4. Make sure the ball bearing retainers in the cabinet side are fully forward. Install drawer into cabinet. Close the drawer.
- 5. Open the drawer and rotate the cam with a Phillips or Pozi screwdriver to vertically position the drawer in relation to the cabinet.



- 6. Install additional set screws to secure.
- **NOTE:** Install drawer pulls or knobs after set screws are in place.




# **Slide ordering Instructions**

Complete your slide order for Accuride models 3832E or 3834E by specifying the following:

<u>10 Pair</u>	<u>C</u>	<u>3832</u>	<u>-E18</u>	D
				T
	<u>10 Pair</u>	<u>10 Pair</u> <u>C</u>	<u>10 Pair C 3832</u>	<u>10 Pair C</u> <u>3832</u> <u>-E18</u>

For the most current technical information please visit www.accuride.com

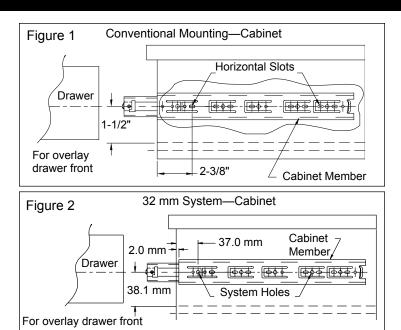


### **Optional Kits**

Rear bracket for face frame installation can be ordered as kit or bulk. Brackets are available in clear zinc finish only. Mounting screws are not included.

To order the kit, specify part number 4180-0752-XE. Each kit contains: 2 rear brackets, and installation instructions. Order 1 kit per pair of slides.

To order in bulk, specify part number 4080-0508-CE. Order 2 rear brackets per pair of slides.



#### **Packaging Options**

Models 3832E, 3834E available in D-pack or bulk packaging. Model CH3832 available in D-pack only.

**Distributor (D) Pack:** All lengths are packaged 10 pair per box. Polybag includes one pair of slides with mounting screws.

**Bulk (P) Pack:** All lengths are packaged 10 pair per box. Slides and screws are ordered and packaged separately.

# Specifications

Slide members and ball retainers: Cold rolled steel Ball bearings: Carburized steel/acetal polymer RoHS compliant.

**NOTE:** Specifications, materials, prices, terms, and delivery are subject to change without notice.

# Accuride

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue Santa Fe Springs, CA 90670 TEL (562) 903-0200 FAX (562) 903-0208 www.accuride.com Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China

Copyright © 2016 Accuride International Inc. 3700-9464(1107)-MK097-R9-0116