




# GUIDE DE PERÇAGE & RÉSISTANCE


## ANCRAGE PAPILLON & PAPILLON À RESSORT


### GUIDE DE RÉSISTANCE

| Ø   | MUR   | PLAFOND  |
|---|---|--|
|  |  |  |
| $\frac{1}{8}$   | 65 LBS → 29 KG  | 22 LBS → 9 KG  |
| $\frac{3}{16}$  | 75 LBS → 34 KG  | 35 LBS → 15 KG   |
| $\frac{1}{4}$   | 115 LBS → 52 KG   | 40 LBS → 18 KG   |

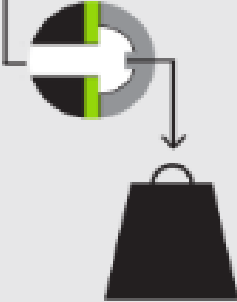

### GUIDE DE PERÇAGE

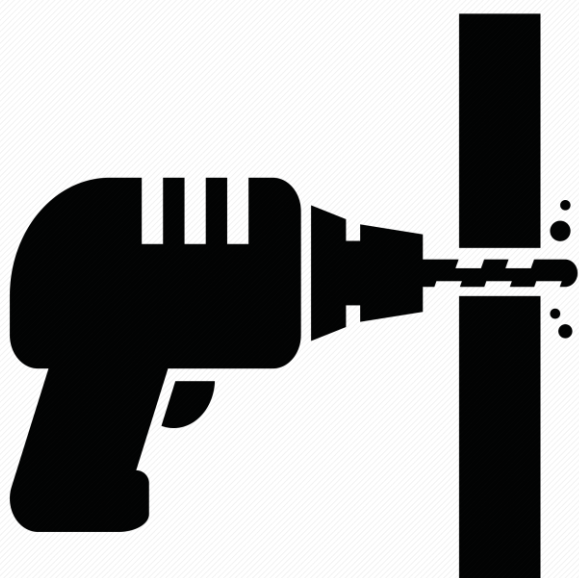

|   |               |               |                |
|---|---------------|---------------|----------------|
|  | $\frac{1}{8}$ | $\frac{1}{4}$ | $\frac{3}{16}$ |
| Ø PERÇAGE   | $\frac{3}{8}$ | $\frac{5}{8}$ | $\frac{1}{2}$  |