


TOOL BALANCER

MOUNT REEL


1a

Mount reel to secure structure directly above work.



1b

NOTE:
Disregard this step if reel is pre-mounted to Torq-Arm or other equipment.



ATTACH TOOL


2a

Raise tool and attach to hook on end of cable.



CAUTION:

Do not pull cable down. It is spring loaded and could cause injury if allowed to snap back.

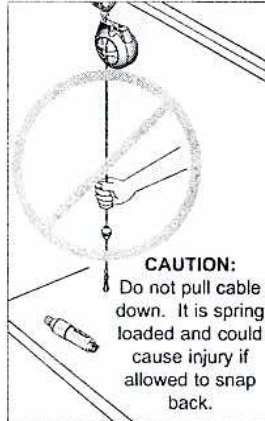

2b


Be sure tool is securely hooked to cable. Do not drop tool. Tool may be heavier than spring can lift before spring is adjusted.



ADJUST TOOL HEIGHT


3a





Determine ideal height for tool when tool is not being used.

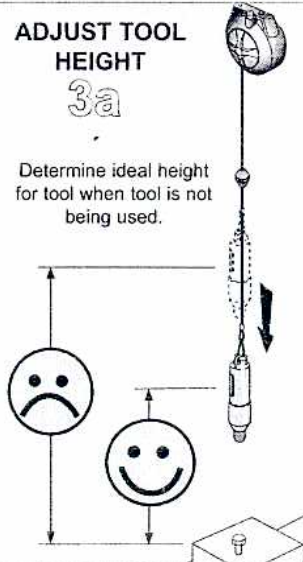

3b

Slide ball stop up or down cable to hold tool at determined height.

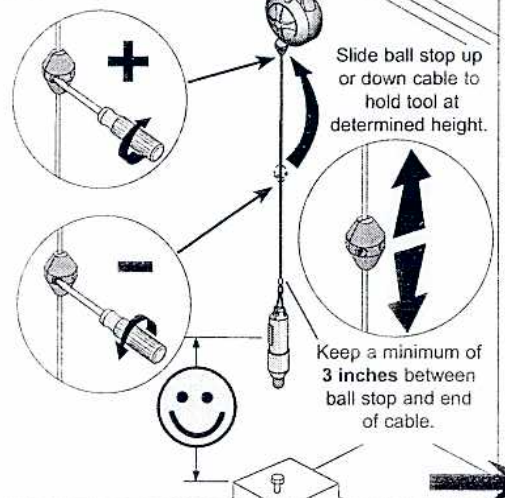

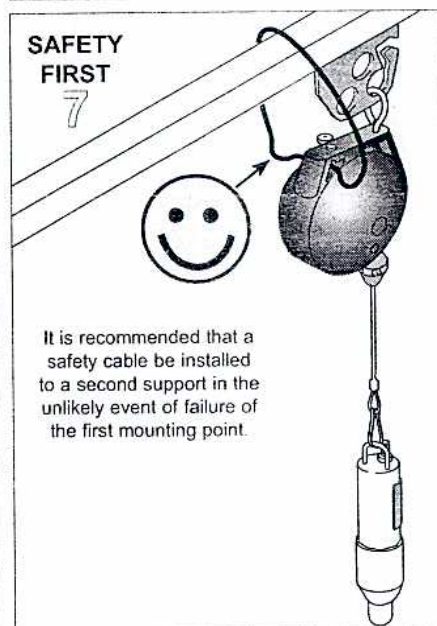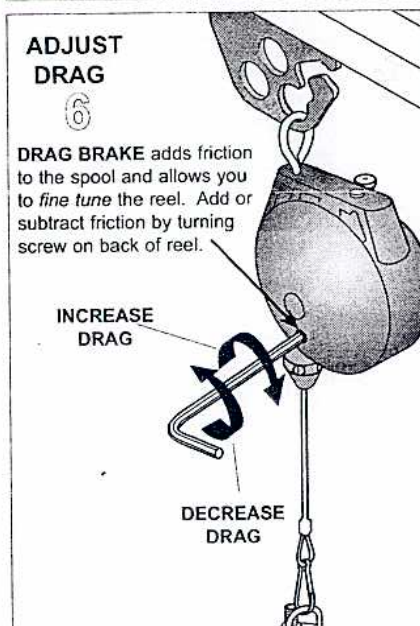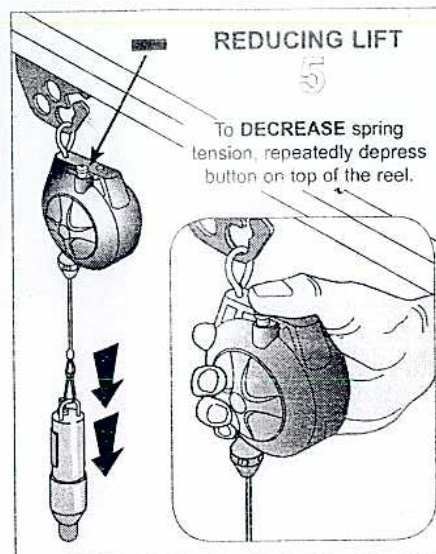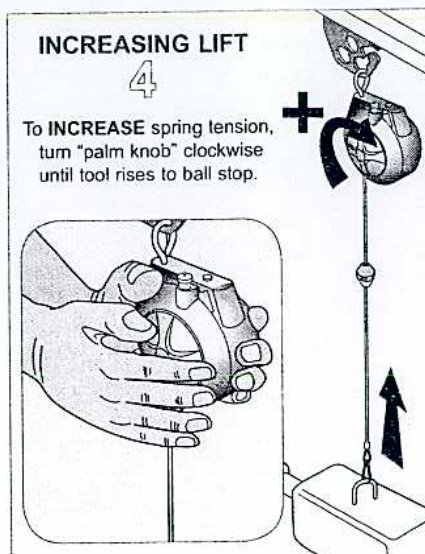

MAINTENANCE:

Periodically inspect cable and hook for wear or looseness. Replace unit if required. Do not lubricate; balance reel is permanently lubricated.



CAUTION:

Do not attempt to remove spring from its canister. Damage or personal injury could result.

TOPRING

TOPRING
P.O. Box 547
Granby, Quebec J2G 8E9
Phone: (514) 375-1828 • FAX: (514) 375-1408