

SL20 FOR DOORS UP TO 20 KG (44 LBS)


- Can be suited to all our standard profiles;
- Vertical adjustment from - 1 mm à + 5 mm;
- Installed inside the cabinet;
- Recommended for 48" or less doors;
- Has top and bottom rails.

For doors equipped with SL20 system, you have to indicate:

- The height of your doors (interior free height of the cabinet (B) - 6 mm = A, see SL20 diagram);
- The width of your doors (to completely cover free space: (free width / 2 + 1/2 of the width of the chosen profile));
- The interior width of your cabinet;
- Single or double rail.



SL20

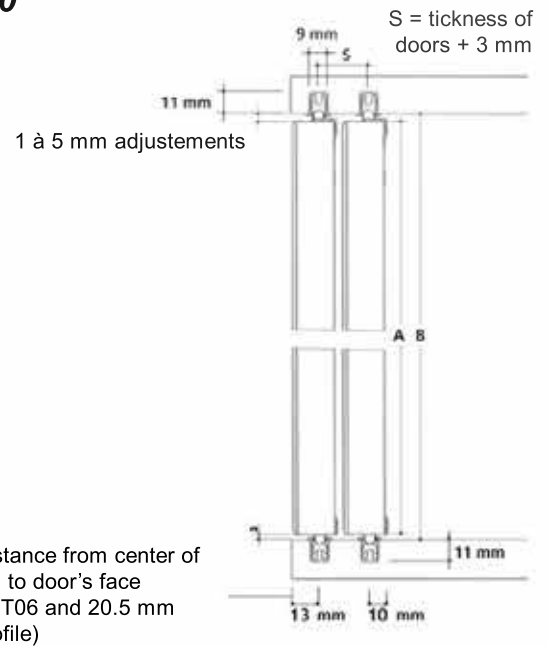

SL35 FOR DOORS UP TO 35 KG (77 LBS)

- Can be suited to all our standard profile;
- Installed inside the cabinet;
- Smooth and silen sliding system;
- Single or double rail;
- Suspended doors that slide on the top rail.
- Guide on the bottom rail.

For doors equipped with SL35 system, you have to indicate:

- The height of your doors (interior free height of the cabinet (B) - 6mm = A, (see diagram SL35));
- The width of your doors (to completely cover free space: (free width / 2 + 1/2 of the width of the chosen profile));
- The interior width of your cabinet;
- Single or double rail.



SL35

