# Fitting for 2 top-running glass doors up to 16 kg (35 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inslide.

#### **Product highlights**

Comfort Smooth, silent running with Comfort Roller and soft and self closing system for different door weights

Aesthetics Continuous, filigree glass fixing profile


#### **Technical specifications**

Max. 16 kg (35 lbs.)


↑ Max. 1400 mm (4'7 1/8'')

← Max. 1000 mm (3'3 3/8'')

↑ ← 6-6.35 mm (1/4'')



#### **Installation examples**

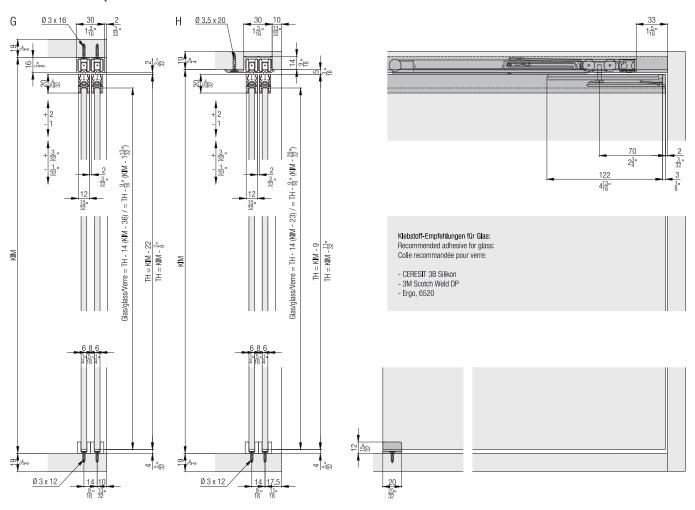

## Set for 2 glass doors up to 16 kg (35 lbs.), with height adjustment

		No.	
Hawa Clipo 16 GPK IS, for 2 doors			053.3264.071
Set consisting of:		053.3264.071	No.
650	Running gear Hawa Clipo 16, with support and screw	4	053.3224.071
	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
	Housing, plastic, anthracite	4	053.3252.071
	Door follower, plastic, grey	1	053.3075.071
242	Pan head thread forming screw, M3x6 mm (1/8"x1/4"), steel, zinc-plated	1	600.0000.488
	Bottom guide, plastic, grey	2	053.3253.001
242	Flat countersunk head chipboard screw, 3x12 mm (1/8"x15/32"), steel, zinc-plated	2	766.5030.112

#### Suspension and glass retaining profiles

	mm (inch)	No.
Glass fixing profile, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16'')	053.3250.250
	3,500 (11' 5 25/32'')	053.3250.350
	6,000 (19' 8 7/32'')	053.3250.600

#### **Adhesive**

	NO.
Glue Ceresit 3B Silicone, 310 ml	098.0027.000

#### **Running tracks**

	mm (inch)	No.
G: Double running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16'')	053.3247.250
	3,500 (11' 5 25/32'')	053.3247.350
	6,000 (19' 8 7/32'')	053.3247.600
H: Double running track, aluminum, pre-drilled	2,500 (8' 2 7/16'')	053.3248.250
	3,500 (11' 5 25/32'')	053.3248.350
	6,000 (19' 8 7/32'')	053.3248.600

#### Soft close up to 8/16 kg (17/35 lbs.)

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072


Set consisting	of:	053.3332.071	053.3332.072	No.
	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
<b>3</b>	Trigger, with stopper	2	2	053.3331.071
242	Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated	2	2	600.0000.482
	Damper, up to 16 kg (35 lbs.)		2	053.3330.072

#### Handles


	No.
Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set	053.3323.971
Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 2-piece set	053.3091.982
Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 50-piece set	053.3091.983
Finger-pull-handle, for glue fixing, 40 mm (1 9/16"), aluminum, anodized	053.3158.901

### Hawa Clipo 16 GPK IS


#### **Accessories**




#### **Calculations**



#### **Door follower**



#### Soft close

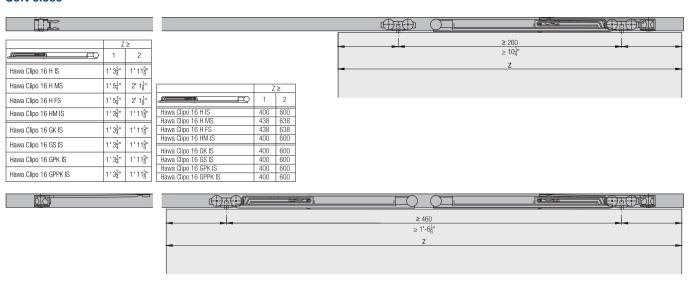

#### **Accessories**

- Glass recommendations from page 249

#### Planning/execution

Further information about the product can be found on www.hawa.com.