

Removal Instructions


1. Unplug the power door opener and disconnect it from the door.
2. Raise garage door completely.
3. Fasten "C" Clamps on both the left and right door tracks against the bottom side of two rollers.
4. Place vise grip on shaft and turn shaft just enough to get the cable off of the drum (if you turn the shaft too much, the cable on the other side of the door may come off its drum as well).
5. Remove loop end of cable from the bottom bracket of the door.
6. Unwind the cable from the drum entirely. Be careful not to scratch the door while removing the cable.

Installation Instructions

1. Insert non-loop end of cable into slot of the cable drum to prevent it from slipping out.
2. Wrap cable tightly around the cable drum (use the other side's cable drum for reference).
3. Attach the loop end of cable to the bottom bracket of the door.
4. Place a vise grip on shaft and turn shaft just enough to finish getting the cable onto the drum.
5. Slowly lower the door by hand to make sure that there is no interference.

Tools Required:

Vise Grips
C-Clamps

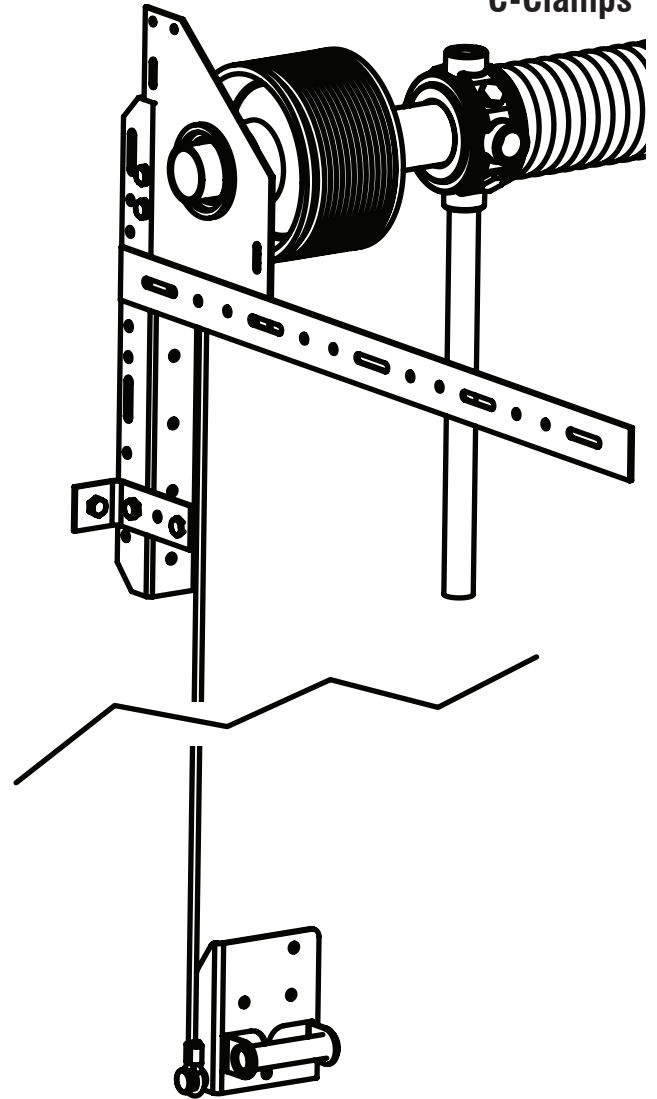

Warning: Improper installation or door position can result in serious injury or death.

- Be sure to read and fully understand all instructions before starting any work.
- Wear eye protection.
- Disconnect power door opener from door before any other step.
- Do not remove more than one part at a time.
- Do not raise or lower without all components installed and tightly secured.
- This hardware is only intended for residential garage doors.
- All hardware, especially extension and torsion springs, is under extreme tension at all times.
- All tension must be released from springs before performing any work.
- If you are unsure if the replacement part matches the part to be replaced or if you do not understand the installation instructions, contact a professional installer.