

ADD A
TOUCH OF
ELEGANCE

Evolution of the panel style lighting


The minimal design of Lineo makes it perfect for under-cabinet installation. The peripheral illuminating body, with diffuser just 4 mm thick, ensures the right light projection from a slim, minimally invasive LED.

ADVANTAGES AND BENEFITS

- Surface-mount installation
- Quick-connect on the body of the light with a pre-wired 78 3/4" (2000 mm) power cable
- Peripheral light source
- Slim panel style design
- Uniform light effect on the work surface
- Simple wire management due to placement
- Matching style with silicone solutions: FlexyLED AT6, SEH4, and Holl

TECHNICAL SPECS

- Tension: 24 V dc
- Height: 3/8" (10 mm)
- Depth: 7 5/16" (186 mm)
- Width: 2 5/8" (67 mm)
- Color Rendering Index: CRI 90
- Luminous flux: 360 lm
- Luminous efficiency: 72 lm/W

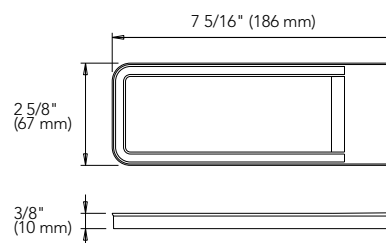

No.	Watts	Color temperature (K)	Finish
137202412290	5 W	3000 warm white	Black
1372024122170	5 W	3000 warm white	Steel
137202412490	5 W	3900 neutral white	Black
1372024124170	5 W	3900 neutral white	Steel

