



IF-360 SYSTEM

FOR INSET RECEDING DOOR

SOFT-CLOSING
SYSTEM



For upward-opening cabinet doors.
Door pockets into the cabinet so it's out
of the way when opened.


**Great for ready-to-use
appliance storage.**

Place your appliance on a pull-out shelf or
inner drawer combined with our docking
drawer for safe power connection.

IF-360 SYSTEM FOR INSET RECEDING DOOR

ADVANTAGES AND BENEFITS

- Soft-down stay successfully passed 30,000 open/close private cycles test
- Ball bearing
- For frameless cabinet
- Door thickness: 5 to 20 mm (19/32 to 25/32")
- Zinc finish

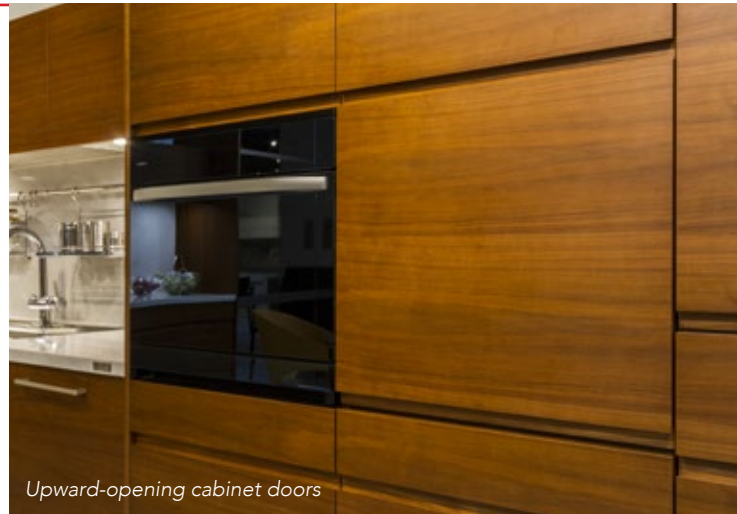

Upward-opening cabinet doors

INCLUDED PRODUCTS

For **75360Sxx**

- 1 x Soft-down stay
- 2 x Slides
- 2 x Hinges
- 2 x Mounting plates
- Mounting hardware

For **75360Wxx**

- 2 x Soft-down stays
- 2 x Slides
- 2 x Hinges
- 2 x Mounting plates
- Mounting hardware

No.	Length	Max door width	Torque
75360S16	5/8" (16 mm)	23 5/8" (600 mm)	44.1 to 154.3 lb (20 to 70 kg)
75360S19	3/4" (19 mm)		
75360W16	5/8" (16 mm)	47 1/4" (1 200 mm)	88.2 to 308.6 lb (40 to 140 kg)
75360W19	3/4" (19 mm)		

Important Information

Torque is the amount of force applied by the door to the mechanism. It is influenced by door height and weight.

To calculate torque, use the following formula:

Torque (lb*in) = door height (in) x 0.5 x door weight (lb) or

Torque(kg*cm) = door height (cm) x 0.5 x door weight (kg)



All components of the mechanism are included

SUGGESTED PRODUCTS

Sliding shelf lock for MOVENTO and TANDEM
No. **WEBKIT1237399**

Blade Docking Drawer

This product has the certifications required for use in the USA and Canada, and is equipped with a blocking thermostat that de-energizes the outlet if the ambient temperature exceeds 120°C.

No. **DD1514160030**



WEBKIT1237399



DD1514160030

