KRABY 164 mm - DROP DOWN

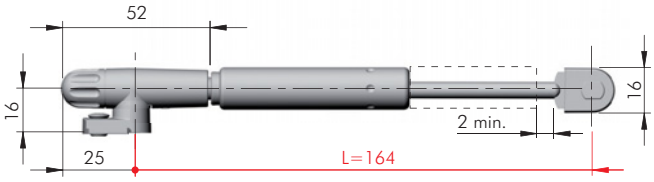



h \ W	1200 max.	
	Stays	Kg
225-250	2 x 164 mm	< 3

This chart refers to chipboard or MDF 18 mm doors and aluminium frame doors with glass 4 mm thick using standard flap or Kimana hinges. These are experimental results to be checked by the customer. **For a better function and for safety reasons, we suggest to use at least two stays per piece of furniture (extra-size doors might require 3 or more gas stays)**. For doors whose weights/dimensions are bigger than those reported on the chart, please increase the number of stays accordingly.
Please make sure that gas stays are properly regulated in height through the apposite rotary knob so that the weight of the door is equally distributed amongst the stays used.
Our technical department is at your disposal to test further cases out of this chart.





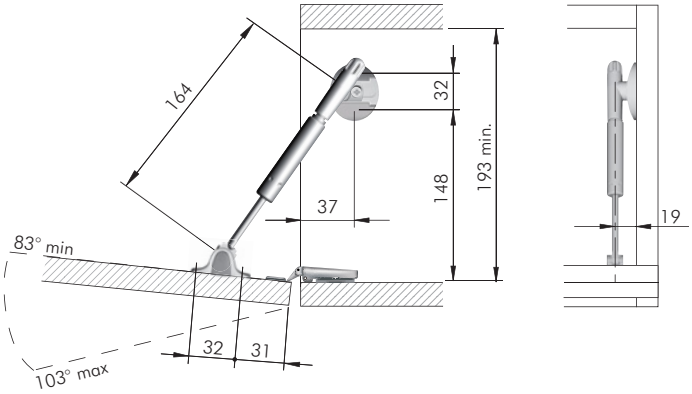

The dimensions of the drilling plan refer to carcases which use standard sprung hinges and mounting plates 0 mm.
Please note that min and max opening angle shown data is purely indicative. It varies with respect to the hinge brand and adjustment carried out.