


# System 1

## Fittings for rigid assembly systems

### Double locking carcass screw

- High performance from widely spaced primary thread
- Finer secondary thread provides additional holding power and positive stop (no override)
- Increased support for vertical panel is gained from the funnel head with collar at its base
- One-piece fitting



Technical and mounting details




Item number

Zinc


Screw  
6x42

00180 →


885

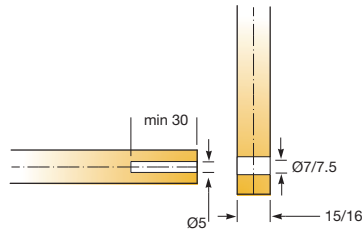


1. Insert screw to shoulder in face board



2. Screw into Ø5mm hole



3. Board joint pulled up by collar on screw



4. Board locked in place by screw

1000 Pcs

Made of zinc