
INSTALLATION INSTRUCTIONS For 4WLS072 and 4WLS073



INSTALLATION INSTRUCTIONS INDEPENDENTLY ROTATING 16" FULL ROUND 6070 SERIES UPPER PANTRY SHELF SYSTEM

- 1. Insert shelf support in tray from bottom with keyway to rear of tray and position top shelf hub on top of tray with keyway to rear of tray. Install three (3) 3/4" x #8 (M1812-251-2) self tapping pan head screws through top hub into shelf support and tighten.
- 2. Locate screw holes with template provided to install bottom positioner on cabinet floor with four (4) each 3/4" by 8 oval head screws.
- 3. Locate screw holes with template provided to install upper pivot support with four (4) each 3/4" by 8 truss head screws.
- 4. Insert bottom end of shaft thru upper shelf, collar, and bottom shelf.
- 5. Tilt the shaft to a horizontal position and ease the shelves thru the cabinet opening. Raise the shaft to an upright position and engage the lower end in the bottom positioner. Engage and seat the upper shaft assembly in the upper pivot support. Tighten the shaft locking screw and the locking screw in the bottom positioner.
- 6. Space the upper shelf as desired and tighten the collar with the locking screw.

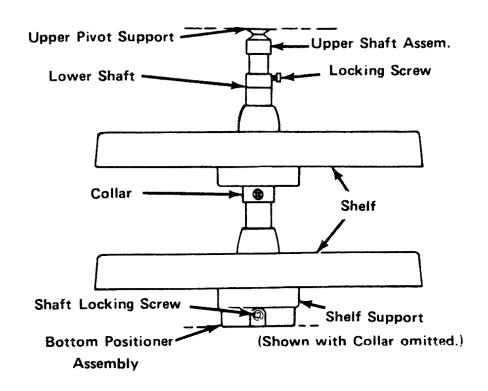

2409 Plantside Drive • Jeffersontown, KY 40299 800-626-1126 • FAX 502-491-2215

I-4WLS072-902 8-06