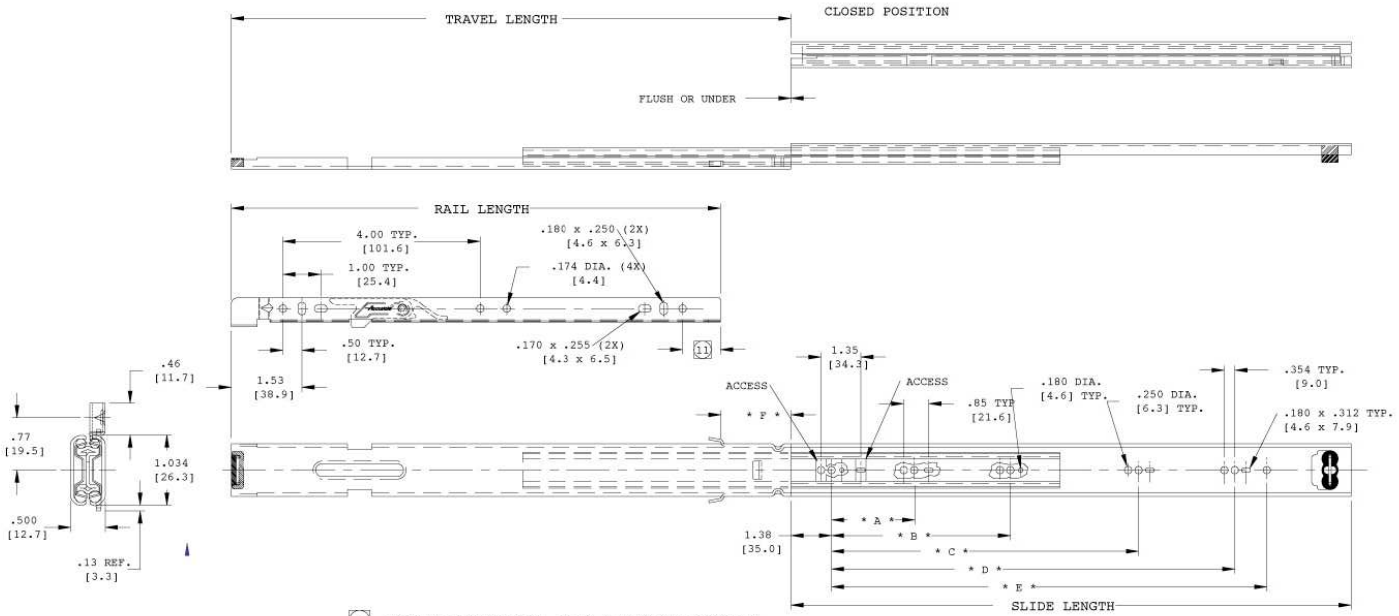

11. FOR RAIL LENGTHS 10.60, 13.12, & 16.90 THIS DIMENSION IS 1.06. FOR RAIL LENGTH 6.50 IT IS .50.

10. SLIDE IS PROVIDED WITH DETENT IN CLOSED POSITION.

9. SLIDE IS PROVIDED WITH SILENCING BUMPERS IN THE OPEN AND THE CLOSED POSITIONS .

8. SLIDE IS UNHANDED.

7. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE SLIDE MEMBERS AT ACCURIDE OPTION.

6. USE ONLY #6 TRUSS HEAD, M-6 EURO SCREWS OR ACCURIDE SPECIAL #8 SCREW (P/N:2410-3218) FOR MOUNTING THROUGH SLIDE MEMBERS. MAX .080 HIGH X .310 DIAMETER SCREW HEAD CLEARANCE NECESSARY IN ORDER TO CLEAR TRAVERSING BALL RETAINER.

5. WIDTH OF SLIDE IS MEASURED IN THE CLOSED POSITION, ACROSS THE AREA WHERE THE SLIDE MEMBERS ARE FULLY ENGAGED WITH BALL BEARINGS.

4. FINISH: ELECTRO-ZINC PLATED, CHROMATE COATED. ('C'=CLEAR ZINC, 'CB'=BLACK ZINC)

3. LUBRICANT: HIGH-LOW TEMPERATURE GREASE.

2. BALL BEARINGS: CARBURIZED STEEL.

1. MATERIAL: SLIDE MEMBERS AND COMPONENT PARTS: WORK HARDENED COLD ROLLED STEEL

NOTES: UNLESS OTHERWISE SPECIFIED.

INCHES [MM]

PART NUMBER	SLIDE LENGTH	TRAVEL LENGTH	* A *	* B *	* C *	* D *	* E *	* F *	RAIL LENGTH
4 2632-8	8.00 [203]	8.00 [203]	5.04 [128.0]	-	-	-	-	1.48 [37.6]	6.50 [165.1]
4 2632-10	10.00 [254]	10.00 [254]	5.04 [128.0]	-	-	-	-	3.48 [88.4]	6.50 [165.1]
4 2632-12	12.00 [305]	12.00 [305]	5.04 [128.0]	8.82 [224.0]	-	-	-	1.38 [35.0]	10.78 [273.8]
4 2632-14	14.00 [356]	14.00 [356]	5.04 [128.0]	8.82 [224.0]	-	-	-	3.38 [85.8]	10.78 [273.8]
4 2632-16	16.00 [406]	16.00 [406]	5.04 [128.0]	8.82 [224.0]	12.60 [320.0]	-	-	2.86 [72.6]	13.38 [337.8]
4 2632-18	18.00 [457]	18.00 [457]	5.04 [128.0]	8.82 [224.0]	13.86 [352.0]	-	-	4.86 [123.4]	13.38 [337.8]
4 2632-20	20.00 [508]	20.00 [508]	5.04 [128.0]	8.82 [224.0]	16.38 [416.0]	-	-	3.08 [78.2]	17.08 [433.8]
4 2632-22	22.00 [559]	22.00 [559]	5.04 [128.0]	8.82 [224.0]	13.86 [352.0]	17.64 [448.0]	18.90 [480.0]	5.08 [129.0]	17.08 [433.8]

THE Accuride PRODUCT COVERED BY U.S. PATENTS #3295025, #3776120 AND OTHER U.S. PATENTS PENDING.

CUSTOMER: ACCURIDE		Accuride®
P/N:	REV.	
SCALE N.T.S.	DATE	CONTROLLING DOCUMENT ☒ ACCURIDE ☐ CUSTOMER	THREE MEMBER BALL BEARING SLIDE
DRAWN TJC	07-22-92	TOLERANCES NOT SHOWN in mm / in mm .xxx ± .010 .25 / Travel ± .13 3.3 / .xx ± .030 .76 / Holes ± .008 .15 / Angular ± 1°	PART NUMBER 4 2632-8/22	REV.
APPROVED			

THIS DOCUMENT IS FURNISHED FOR THE EXPRESS AND EXCLUSIVE PURPOSE OF CONVEYING INFORMATION TO CUSTOMERS AND SUPPLIERS OF ACCURIDE INTERNATIONAL INC., AND IS NOT TO BE DISCLOSED TO COMPETITIVE SOURCES.

SYM.	IS	DESCRIPTION	WAS	DATE	APPD.

REVISIONS