

Set for single door, without running track

	code
HAWA-Junior 40/Z	25902
HAWA-Junior 40/Z, with 2 track stops	26038
For two-panel sliding doors please order two sets for single doors.	

Set comprising

		25902	26038	code
	Two-wheeled trolley, M8, with plastic wheels	2	2	25898
	Two-way suspension plate, with hanger bolt M8 and fixing screws	2	2	10488
	Track stop, adjustable retaining force	1	2	10640
	Screw-on rubber door stop	1	1	10629
	Guide, rattle proof, for screw mounting to floor, groove width 10 mm (3/8"), black plastic	1	1	14427
	Vertical adjustment pin	1	1	10795

Running tracks

Caution: Hole positions vary		mm/inch	code
	Running track, alu plain anodized, predrilled	1400 (4'7 1/8")	10213
		1600 (5'3")	10214
		1800 (5'10 7/8")	10215
		2000 (6'6 3/4")	10216
		2500 (8'2 7/16")	25997
		3000 (9'10 1/8")	18530
		4000 (13'1 1/2")	18531
6000 (19'8 7/32")	10211		
	cut to size	10217	

SoftMove 40 soft closing mechanism for HAWA-Junior 40

	code
	25987

SoftMove 40 soft closing mechanism for HAWA-Junior 40 (details: → page 66)

Set for mountable and demountable running track to HAWA-Junior 40 (details: → page 68 – 69)

Hardware system for sliding doors weighing up to 40 kg (88 lbs.).

Description

The HAWA-Junior 40/Z is a highly reliable hardware system with two-way suspension for wooden sliding doors with a maximum panel weight of 40 kg (88 lbs.). The two-way suspension permits the sliding doors to be suspended or taken off in two different ways.

Features of the HAWA-Junior 40/Z

- Two-way suspension
- Light and silent action
- Adjustable vertically [3 mm (1/8")] and laterally
- Track stop, adjustable retaining force
- combinable with SoftMove 40 soft closing mechanism for HAWA-Junior 40
- can be combined with assembly set for HAWA-Junior 40 for wall pocket solutions
- with wall pocket solutions use bottom guide 25369

Accessories

Caution: Minor differences in colour are possible		code	
	Guide profile, plastic black, 1300 mm (4'3 3/16"), groove mounted, set of 10 pieces	14540	
	Cover cap for running track, plastic anthracite-grey RAL 7016	20901	
	Bottom door stop with centering assembly	dull chromium finish	20773
		stainless steel effect	21473
	Guide, rattle proof, for screw mounting to floor, groove width 10 mm (3/8"), black plastic	25369	
	Spring-loaded door stop for door weight up to 40 kg (88 lbs.) integrated in HAWA-Junior 40 running track	27200	
	Two-wheeled trolley, M8, with plastic wheels, set of 10 pieces	25963	
	Two-way suspension plate, with hanger bolt M8 and fixing screws, set of 10 pieces	25954	
	Track stop, adjustable retaining force, set of 10 pieces	25957	
	Guide, rattle proof, for screw mounting to floor, groove width 10 mm (3/8"), black plastic, set of 10 pieces	25958	


Further accessories: → pages 68–83

Rattle proof floor guide for wall pocket

The rattle-proof floor guide [groove width 10 mm (3/8")] is now 35 mm (1 3/8") long and laterally adjustable. It enables the door to be pushed into a finished wall pocket.

The following factors play a role in calculating the width of the sliding door:

- Open or closed guide groove
- Design with or without a door push-out (spring-loaded door stop no. 27200)

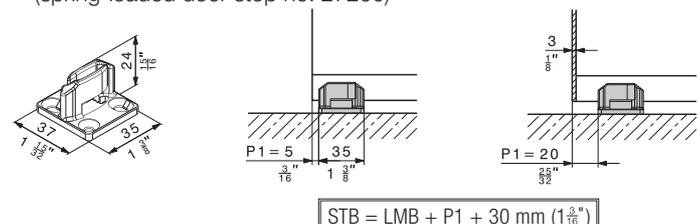

Planning/installation

For planning and execution please use the installation instructions code 17689. (→ www.hawa.ch → HAWA-Productfinder)
HAWA-Junior hardware may also be used for glass sliding doors.
Please request the corresponding documentation.