

UNDER CABINET LIGHTING

APEX RECESSED PROFILE

Control: Decora Bluetooth Wall Dimmer



POWER SUPPLY INSTALLATION: PLUG-IN OR HARDWIRE

- Apex profile, available in two lengths: 78 3/4" (2 m) L and 118 1/8" (3 m) L, can be cut easily with a miter saw.
- Apex profile dimensions: 3/8" (9 mm) W x 7/16" (10.5 mm) H.
- FlexyLED HE6 PW is a LED strip with 280 LED/m on a circuit 1/4" (6 mm) W.
- FlexyLED HE6 PW available in fixed lengths (trimmable): 19 11/16" (500 mm), 39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm), 98 7/16" (3000 mm).
- Kits recommended for a 96" counter.
- 78" power cable is pre-wired to the FlexyLED HE6 PW.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Power supply features optional plug-in installation with detachable power cable.*

STARTER KIT

Order the quantities below for each part number to complete 1 kit shown in the installation layout.



Qty.	No.	Description
4	16612219	FlexyLED HE6 PW, 3000 K warm white, 19 11/16" (500 mm) length, 5W, 24V
1	3055379	Apex recessed profile, 78 3/4" length, polycarbonate
4	3055304	Apex end caps, polycarbonate, 2-pack
1	DH2424	Dimmable power supply, 24W, 24V plug-in or hardwire
1	109D00101	Decora bluetooth digital dimmer with white, ivory and light almond face plates
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

LED



POWER SUPPLY




CONTROL

Decora bluetooth wall dimmer




Face plate finishes, included



INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

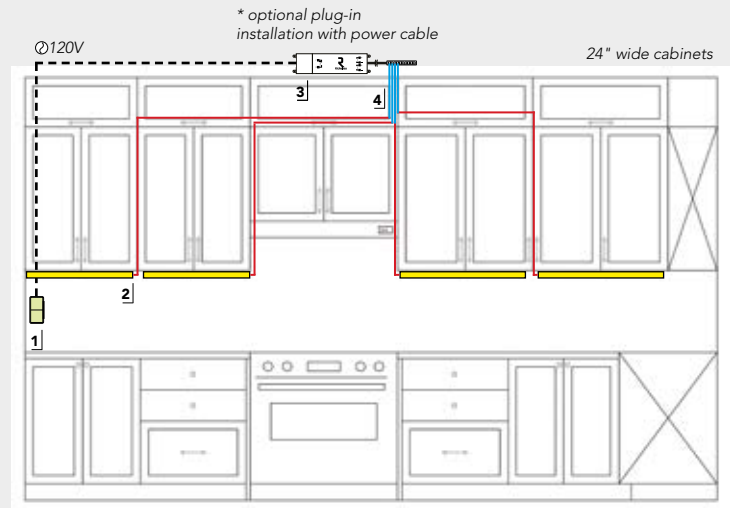

- Decora dimmer, 109D00101.
- Apex profile, 3055379 and FlexyLED HE6 PW, 16612219.
- Power supply, DH2424.
- Extension cable, 247901562.

----- 120V wire supplied by others