



# *Kitchen Essentials*

The must-have components for every kitchen





# DECORATIVE HARDWARE

**Richelieu** decorative hardware — pure elegance and sophisticated design. A collection of over 6000 pulls, knobs and hooks in a multitude of finishes, materials and design combinations. Three complimentary lines with the right style for any taste.

## EXCLUSIVE COLLECTION



## INSPIRATION COLLECTION



## EXPRESSION COLLECTION





# PANTRY



BEFORE

## CONVOY LAVIDO

The **Convoy** system offers maximum convenience in food storage, with optimal use of space and quick and easy access.

- Central storage space for dry goods
- 360° visibility
- Easy shelf adjustment to any height
- Opens with just a slight pull and closes smoothly and quietly
- A system that elicits emotion!



AFTER



EASY TO  
INSTALL!



360° visibility

For a complete unit, order: 1x frame + 1x runner No. **23730100** + 1x set of 4 shelves + x number of extra shelves, as needed

### FRAME

NO.	FRAME HEIGHT	RECOMMENDED INTERNAL HEIGHT	NUMBER OF RECOMMENDED SHELVES
<b>23610100</b>	28 3/4" (730 mm)	43 1/4" (1100 mm)	4
<b>23670100</b>	52 3/8" (1330 mm)	66 7/8" (1700 mm)	5
<b>23690100</b>	60 1/4" (1530 mm)	74 3/4" (1900 mm)	5

### SET OF 4 SHELVES

GRAY/ CHROME	MAPLE/ CHROME	SHELVES WIDTH	REQUIRED OPENING (W)
<b>2531140100</b>	<b>2531140150</b>	15 3/4" (400 mm)	16 1/4" (412 mm)
<b>2533140100</b>	<b>2533140150</b>	17 3/4" (450 mm)	18 1/8" (462 mm)
<b>2534140100</b>	<b>2534140150</b>	21 5/8" (550 mm)	22 1/8" (562 mm)

### SINGLE SHELF

GRAY/ CHROME	MAPLE/ CHROME	SHELVES WIDTH	REQUIRED OPENING (W)
<b>1531140100</b>	<b>1531140150</b>	15 3/4" (400 mm)	17 3/4" (450 mm)
<b>1533140100</b>	<b>1533140150</b>	17 3/4" (450 mm)	19 5/8" (500 mm)
<b>1534140100</b>	<b>1534140150</b>	21 5/8" (550 mm)	23 5/8" (600 mm)

**IMPORTANT:** Required interior installation depth – min. 19 3/4" (500 mm)



## KITO - PULL-OUT SYSTEM FOR BASE CABINET

Keeps frequently used products for meal preparation readily available and right at your fingertips.

- The system pulls out when you open the cabinet door
- Comes with a soft-close sliding mechanism
- Contents are accessible from 3 sides and from the top
- Can be mounted with a right- or left-handed door opening (arm sold separately)
- Comes with a side rack for storing cutting boards and containers for smaller items

NO.	PRODUCT DIMENSIONS		REQUIRED INSTALLATION DIMENSIONS	
	W	D x H	W	D x H
<b>216600110</b>	15 3/4" (400 mm)	18 7/8" x 19 11/16" (480 x 500 mm)	16 1/4" to 16 7/16" (412 to 418 mm)	19 11/16" x 22 1/16" (500 x 560 mm)
<b>216450110</b>	21 21/32" (550 mm)	18 7/8" x 19 11/16" (480 x 500 mm)	22 1/8" to 22 3/8" (562 to 568 mm)	19 11/16" x 22 1/16" (500 x 560 mm)

# UNDERSINK



INSTALLATION  
TIME  
**30** minutes  
or less

## 4 SOLUTIONS FOR TIDYING UP UNDERSINK STORAGE

100% functional and safe

- Pull-out towel rack
- Sliding basket for cleaning products
- Sliding waste container
- Undersink mat



**A** Pull-Out Towel Rack  
**314330**

## OTHER SUGGESTED PRODUCTS



Plastic Waste Bin 13 l  
**T2700100** (gray)



Tray Divider  
**1001830** (white), **0018140** (chrome)

REF. NO.	DESCRIPTION	DIMENSIONS (W x D x H)	FINISH
<b>A 314330</b>	Pull-out towel rack (3 arms)	7 1/2" x 17 1/8" x 3 5/8" (191 x 435 x 92 mm)	White
<b>B 5551140100</b>	Sliding basket for cleaning products	Min. req.: 11 3/4" x 18 7/8" x 18 7/8" (298 x 480 x 480 mm)	Chrome/Gray
<b>C 2260100</b>	Waste bin 21.1 qt. (20 l)	Min. req.: 10" x 17 3/4" x 18 1/2" (255 x 450 x 470 mm)	Brown/Beige
<b>C 2270100</b>	Waste bin 2 x 14.8 qt. (14 l)	Min. req.: 10" x 17 3/4" x 18 1/2" (255 x 450 x 470 mm)	Brown/Beige
<b>D 461250170</b>	Undersink mat	W x D: 45 1/4" x 23 5/8" (1150 x 600 mm)	Gray
<b>D 461250015</b>	Undersink mat	W x D: 45 1/4" x 23 5/8" (1150 x 600 mm)	Maple



# BLIND CORNER



**AFTER**



**BEFORE**



**INSTALLATION  
TIME**  
**20** minutes  
or less

DOOR WIDTH	GRAY/CHROME	MAPLE/CHROME	OPENING
17 3/4" (450 mm)	6930140100	6930140150	Right
17 3/4" (450 mm)	6931140100	6931140150	Left
19 5/8" (500 mm)	6932140100	6932140150	Right
19 5/8" (500 mm)	6933140100	6933140150	Left
23 5/8" (600 mm)	6934140100	6934140150	Right
23 5/8" (600 mm)	6935140100	6935140150	Left

## LEMANS II

The perfect solution for blind corner cabinets: convert lost space into functional storage. Each shelf efficiently swings out from the cabinet to offer more space, a complete view of contents and great ease of use.

- Height-adjustable trays
- Easy to retrofit in blind corners
- Smooth motion generates emotion

# WASTE BINS & RECYCLING



**BEFORE**



**AFTER**

## US CARGO

A smart recycling center: helping the environment starts at home with this easy system.

- Large bin capacity in a small space
- Ergonomic handling
- Up to 100,000 opening cycles
- Weight capacity: 110 lb (50 kg)



**INSTALLATION  
TIME**  
**20** minutes  
or less

NO.	CAPACITY	DIMENSIONS (W x D x H)	FINISH
461315100	Single 42.3 qt. (40 l) + single 8.9 qt. (8.5 l) with Soft Motion	13 3/4" x 22 1/2" x 20 3/4" (349 x 572 x 527 mm)	Gray
461318100	Single 42.3 qt. (40 l) + single 12.7 qt. (12 l)	16 3/4" x 22 1/2" x 20 3/4" (425 x 572 x 527 mm)	Gray
461321100	Double 42.3 qt. (40 l) with Soft Motion	19 3/4" x 22 1/2" x 20 3/4" (502 x 572 x 527 mm)	Gray

# VERSATILE LED LIGHTING SOLUTIONS for every kitchen

See our Lighting Solutions brochure for our complete selection.

## TAPE LIGHTS



- Can be cut every 2" and reconnected
- No-solder clip system
- Fast installation with a double-sided adhesive

## FLEXILED CH LED TAPE LIGHT

NO.	WATTS	KELVIN COLOR T°	LIGHT COLOR	LENGTH
103197122	24W	3100 °K	Warm white	197"
103197124	24W	4300 °K	Neutral white	197"
103788122	96W	3100 °K	Warm white	788"
103788124	96W	4300 °K	Neutral white	788"

REQUIRES ONE OF THESE POWER SUPPLIES: 51206, 51215, 51230, 51260.

## LED LEAF FOR CABINETS



Installed directly at the top of a cabinet interior. An electronic proximity sensor automatically turns the light on when the cabinet door is opened and switches it off after 30 seconds of no motion.

NO.	WATTS	LIGHT COLOR	LENGTH	LUMINOUS FLUX
108120410	1.92W	Neutral white	16" (409 mm)	163 Lumen
108120560	2.64W	Neutral white	22" (559 mm)	225 Lumen
108120860	4.08W	Neutral white	33 13/16" (859 mm)	347 Lumen
108121160	5.52W	Neutral white	45 11/16" (1160 mm)	470 Lumen

REQUIRES ONE OF THESE POWER SUPPLIES: 51206, 51215, 51230, 51260.

## PUCK LIGHTS



Quick-connect located at the base



SMALLY is an innovative 3W LED puck light with a wide light beam, designed to be installed in a recessed 2 1/4" (57 mm) diameter hole with a shallow depth of only 15/32" (12 mm).



## SWITCHES, DIMMERS AND POWER SUPPLIES

There are many options to choose from, visit [www.richelieu.com](http://www.richelieu.com) to see our entire selection.



### TOUCH-ME LED DIMMABLE SWITCH

NO.	WATTS
152125601	60W



### POWER SUPPLIES

NO.	WATTS
51206	6W
51215	15W
51230	30W
51260	60W



### KLIPR LED TAPE CONNECTOR

NO.	LENGTH
30141093	79"

## SMALLY LED - RECESSED MOUNT

NO.	WATTS	KELVIN COLOR T°	LIGHT COLOR
153122010	3W	3000 °K	Warm white
153124010	3W	4300 °K	Neutral white

## TRIM RINGS FOR SURFACE MOUNT

NO.	HEIGHT	FEATURES
15312010	3/4" (19 mm)	Round trim ring
15314010	1 15/32" (37 mm)	20° angled trim ring

Aluminum finish

REQUIRES ONE OF THESE POWER SUPPLIES: 51206, 51215, 51230, 51260



Smally surface-mount 20° trim ring




Smally surface-mount round trim ring



See our Lighting Solutions brochure for our complete selection.

## RECESSED PROFILES

A discrete and neat appearance

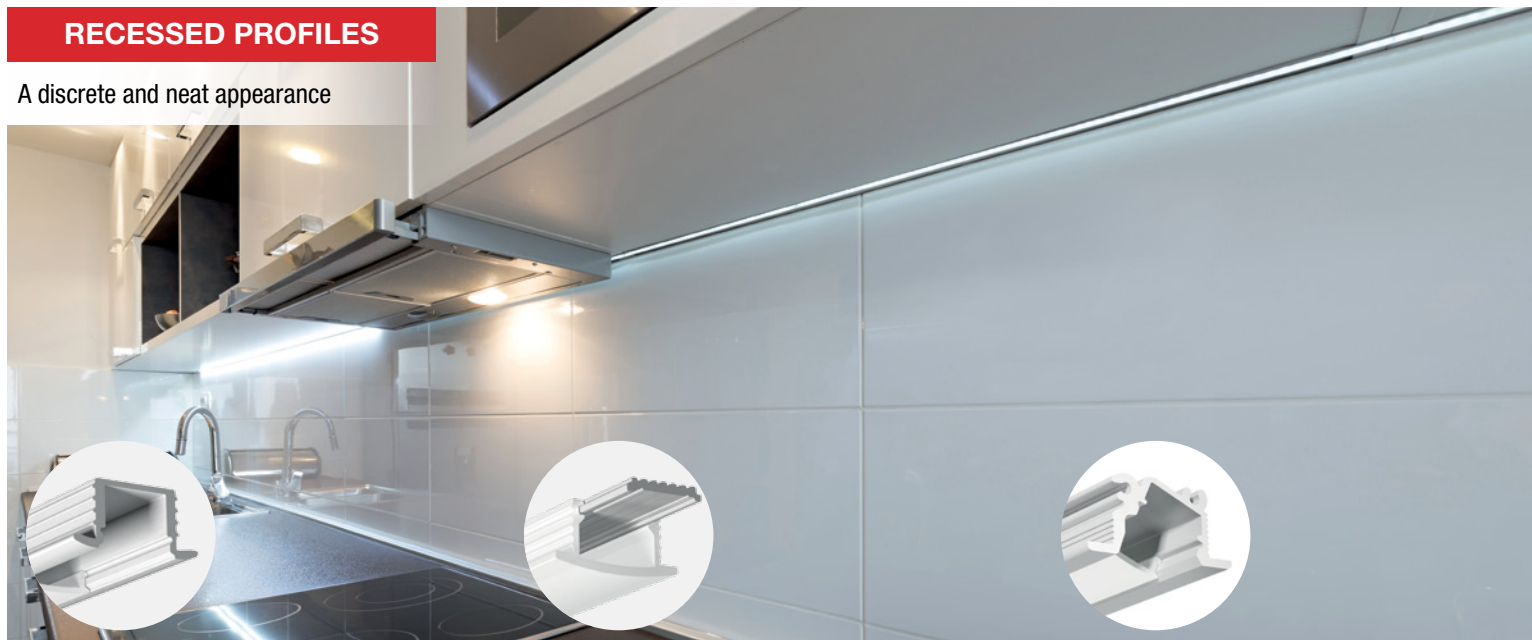

### RECESSED PROFILE WITH REMOVABLE LENS

NO.	DESCRIPTION
30145350	5/8" aluminum profile with opal lens

Length: 96" (2440 mm)

### RECESSED PROFILE WITH BUILT-IN LENS

NO.	DESCRIPTION
30145300	5/8" aluminum profile with opal lens

Length: 96" (2440 mm)

### RECESSED PROFILE WITH 25° ANGLED LIGHT BEAM

NO.	DESCRIPTION
30145450	Aluminum profile with opal lens

Length: 96" (2440 mm)

## SURFACE-MOUNTED PROFILES

- Can be easily cut with a miter saw
- Easy installation



### SURFACE-MOUNT PROFILE

NO.	DESCRIPTION
30141210	Aluminum profile with removable opal lens
30141004	4 swivel mounting clips
30141280	4 flat mounting clips
30141283	(4) 45° mounting clips
30141270	4 end surface caps

Length: 96" (2440 mm)

### SURFACE-MOUNT LOW PROFILE

NO.	DESCRIPTION
30141100	Low aluminum profile with removable opal lens
30141004	4 swivel mounting clips
30141280	4 flat mounting clips
30141283	(4) 45° mounting clips
30141122	4 end caps

Length: 96" (2440 mm)

### SURFACE-MOUNT 30° ANGLED PROFILE

NO.	DESCRIPTION
30141650	30° angled aluminum profile with removable opal lens
30141654	4 end caps

Length: 96" (2440 mm)

### SURFACE-MOUNT 45° CORNER PROFILE

NO.	DESCRIPTION
30142010	45° aluminum corner profile with removable opal lens
30141282	(4) 45° mounting clips
30142070	4 end caps

Length: 96" (2440 mm)




## COOKO

Base cabinet pull-out system for storing ingredients and cooking utensils.

- Versatile and flexible. Customize your storage organization as you need
- Made of chrome wire with clip-on plastic containers
- All plastic elements are removable and dishwasher safe
- Bottom mounting with full-extension slides for complete access and soft closing
- For pull-out or hinged doors

NO.	DESCRIPTION	REQUIRED INTERIOR DIMENSIONS (W x D x H)
25234140100	For hinged door	12 1/4" x 19 1/4" x 24 5/8" (310 x 489 x 625 mm)
25235140100	For pull-out doors	10 1/4" x 19 1/4" x 24 5/8" (260 x 489 x 625 mm)

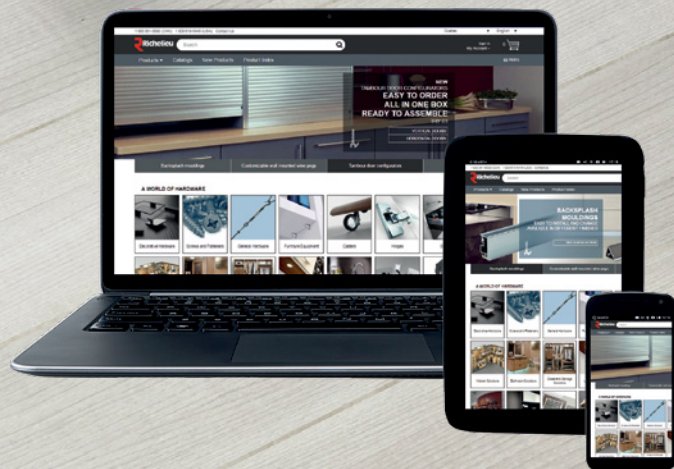

[www.richelieu.com](http://www.richelieu.com)

Richelieu's newly designed website with powerful search functions and improved filters for quickly navigating through **Richelieu's** huge catalog.

Use our website's **NEW SHOWROOM MODE** to display the suggested retail price.

Offer your customers **QUICK & EASY SERVICE!**

**Richelieu**

**Serving you across North America**

**CANADA**

Tel.: 1 800 361-6000  
Fax: 1 800 363-0193

[www.richelieu.com](http://www.richelieu.com)

**UNITED STATES**

Tel.: 1 800 619-5446  
Fax: 1 800 876-7454



KITDEALE 06-2017  
Printed in Canada \$2