

LED

A LED (light-emitting diode) offers consistent color quality and no UV light, so it won't fade product. It is ideal for accent lighting in furniture, cabinets and displays, where light is required in tight spaces. When the power to a LED is converted into light, minimal heat is produced which makes them an especially safe light source in any environment. LED lights have a remarkable long life due to the fact that they do not use bulbs; there is an electronic component that emits its highest light output for up to 50,000 hours. With a lower consumption per watt, available in both warm and cool white. LED lights are at the cutting edge of lighting technology and the ideal solution for all commercial designs!

LEGEND



Wattage



Diameter



Width



Height



Depth



Length



Borehole



Degree
of Swivel



Average
Life



Energy Efficient



Dimmable



Touch Function



Battery Operated



Motion Sensor



USB



HDMI



Bluetooth

ATOM 24 V LED PUCK LIGHTS

- Easy to install - no tools required
- Recessed or surface mounted installation:
 - Recessed: 2 1/4" (57 mm) hole with an installation depth of only 5/16" (8 mm)
 - Surface-mount: 2 different style trim rings (round or angled 20°), sold separately
- Special EDGE LED cluster offers wide projection beam and uniform illumination
- No-dot effect LED technology - provides a uniform and diffused light projection

Application: Kitchens, living rooms, bedrooms, inside cabinets, under cabinets and under shelves.

Sold by unit

PRODUCT	LIGHT	KELVIN COLOR T°	FINISH	QTY/ BOX
126122195	Warm white	3000 K	Satin nickel	20
126124195	Neutral white	4000 K		
126122030	Warm white	3000 K	White	
126124030	Neutral white	4000 K		

Required power supply:

PRODUCT	DESCRIPTION
52406	24 V power supply - 6 watts
52430	24 V power supply - 30 watts
52475	24 V power supply - 75 watts

Suggested product(s):

PRODUCT	DESCRIPTION
12612195	Round trim ring (Satin nickel)
12612030	Round trim ring (White)
12614195	20° angled trim ring (Satin nickel)
12614030	20° angled trim ring (White)





3 W



5/16"
(8 mm)



2 1/4"
(57 mm)




K-PAD 24 V LED FLAT PANEL LIGHTS

- 5/16" (8 mm) thick LED panel designed for quick surface installation
- Available in two versions:
 - K-PAD Touch: Master infrared dimmer switch and Slave (without switch)
 - K-PAD IR: Incorporates an infrared sensor that automatically switches the lights on and off when the door is opened and closed
- Built-in control function to turn all the lights on and off
- Special EDGE LED cluster offers wide projection beam and uniform illumination
- No-dot effect LED technology - provides a wide and diffused light projection
- Available in stainless steel finish only

Application: Kitchens, living rooms, bedrooms, inside cabinets, under cabinets and under shelves.

Sold by unit

PRODUCT	DESCRIPTION	LIGHT	KELVIN COLOR T°	QTY/BOX
127124170	K-PAD Touch – Master	Warm white	3100 K	20
127122170	with built-In touch LED dimmer	Neutral white	4000 K	
128122170	K-PAD Touch – Slave	Warm white	3100 K	
128124170	without integrated IR switch	Neutral white	4000 K	
129122170	K-PAD IR	Warm white	3100 K	
129124170		Neutral white	4000 K	



Required power supply:

PRODUCT	DESCRIPTION
52406	24 V power supply - 6 watts
52430	24 V power supply - 30 watts
52475	24 V power supply - 75 watts

Suggested product(s):

PRODUCT	DESCRIPTION
12624905	FW Dot touch dimmer
12624805	DOT IR FW (Infrared) dimmer
12624601	Infrared proximity sensor

DOT FW DIMMERS

Infrared sensor door switch and touch dimming switch for 12 V and 24 V LED lights.

- Easy surface mount installation to control lights
- Plug-and-play, quick connect feature
- No hard wire or cutting of wires
- Available in two versions:
 - DOT FW Touch dimmer: touch on/off dimming switch
 - DOT IR FW (Infrared) dimmer: automatic on/off infrared sensor door contact switch
- DOT FW - Prolonged touch controls the light intensity (dimmer function)
- DOT IR FW - Lights are turned on and off with the opening and closing of the door


Application: Kitchens, living rooms, bedrooms, inside cabinets, under cabinets and under shelves.

Included: 79" (2 m) long cord and terminal block included for connections of up to 8 lights

PRODUCT	DESCRIPTION	FINISH	QTY/BOX
12624905	DOT FW Touch dimmer	Aluminum	1
12624805	DOT IR FW (Infrared) dimmer		

Suggested product(s):


PRODUCT	DESCRIPTION
126122195	LED 3W Atom 24Vdc Puck Light
128124170	LED 5 W K-Pad

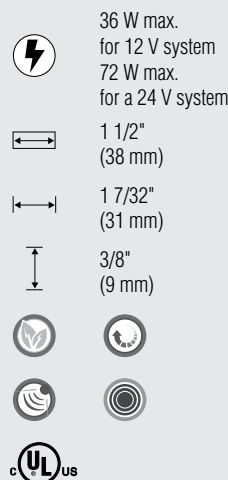

12624905



12624805



INFRARED PROXIMITY SENSOR

Proximity door contact on/off switch for 12 V and 24 V LED lights.

- Easy surface mount installation with 2-sided tape option
- IR proximity works as door contact switch or On/Off switch
- No hard wire or cutting of wires
- Maximum installation distance 2" (50 mm) from door contact
- 79" long (2 m) cord and terminal block included

Application: Kitchens, living rooms, bedrooms, inside cabinets, under cabinets and under shelves.

PRODUCT	FINISH	QTY/BOX
12624601	White	1

Suggested product(s):

PRODUCT	DESCRIPTION
126122195	LED 3W Atom 24Vdc Puck Light
128124170	LED 5 W K-Pad





36 W max.
for 12 V system
72 W max.
for a 24 V system



9/16"



2 15/32"
(63 mm)

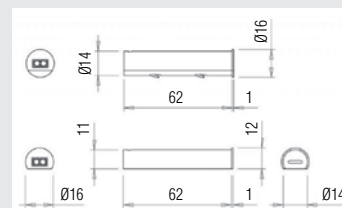

LED CALL-ME SWITCH

Wireless remote control for 12 V and 24 V LED lights.

- Prolonged touch controls the light intensity (dimmer function)
- Auto switch off after 18 hours of continuous operation
- Controls up to 10 lights
- Maximum range of 10 meters (33')
- Included holder for recessed installation

Application: Kitchens, living rooms, bedrooms, inside cabinets, under cabinets and under shelves.

PRODUCT	FINISH	QTY/BOX
152127010	Aluminum	1

Suggested product(s):

PRODUCT	DESCRIPTION
126122195	LED 3W Atom 24Vdc Puck Light
128124170	LED 5 W K-Pad





34 W



9/16"
(14 mm)



1 13/32"
(36 mm)

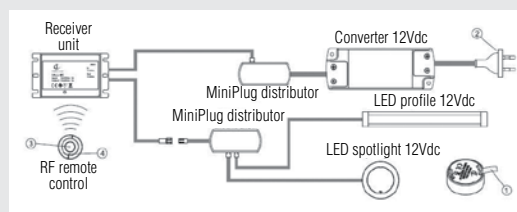

LED 120 V DIRECT PLUG LIGHTS

A simple and sophisticated solution for customers daunted by the placement of power supplies.

- Quick and simple - recessed or surface mounted installation (trim rings included)
- Direct connection - no power supply required
- Different color options available - solutions to suit any design need
- Top performance - exceptional energy efficiency and long lamp life
- Available in three different designs: round, square and linear

Application: Kitchens, living rooms and bedroom furniture

Sold by unit




2 3/8"
(60 mm)



A



B



C

REF.	PRODUCT	SHAPE	LIGHT COLOR	KELVIN COLOR T°	HEIGHT	WATTS	FINISH	QTY/ BOX
A	170122195	Round	Warm White	3000 K	11/16" (17 mm)	2.5 W	Satin Nickel	100
	170122090				Black			
	170122170				Stainless Steel			
	170122030				White			
	170124195		Neutral White	4200 K	15/16" (23 mm)	2.5 W	Satin Nickel	
	170124090						Black	
	170124170						Stainless Steel	
	170124030						White	
B	17212219	Square	Warm White	3000 K	11/16" (17 mm)	2.5 W	Satin Nickel	
	172122030				Black			
	172122090				Stainless Steel			
	172124195				White			
	172122170		Neutral White	4200 K	15/16" (23 mm)	2.5 W	Satin Nickel	
	172124030						Black	
	172124090						Stainless Steel	
	172124170						White	
C	1701220012	Linear	Warm White	3000 K	12" (305 mm)	3 W	Silver, White	
	1701220016				16" (405 mm)			
	1701240012		Neutral White	4200 K	12" (305 mm)	2.6 W		
	1701240016				16" (405 mm)	2.6 W		

Required product(s):

PRODUCT	DESCRIPTION
170120S70	LED 120 V 70" power cord with switch
170120070	LED 120 V 70" power cord without switch

LED POCKIT® 120 V PUCK LIGHTS

Smaller size puck light that produces 25% more light output than traditional halogen and xenon puck lights.

- Easy recess or surface mount installation
- Each fixture has a built-in dimmable driver
- Linkable up to 15 fixtures - dimmable to 50% by standard LED wall dimmers
- All-metal construction provides for optimal heat sinking
- True plug-and-play - no transformer or power supply required

Application: Displays, task lighting/flood lighting, interior cabinets/shelving and under cabinets



Included: Linkable model with (2) 8 1/2" (216 mm) cords to link in series. Surface-mount ring included with each light.

Important: Power cord required (sold separately)

PRODUCT	LIGHT	KELVIN COLOR T°	VOLTAGE	FINISH	QTY/ BOX
LMPOC4W120LWWH	Warm White	3000 K	120 V	White	1
LMPOC4W120LWNI				Nickel	10
LMPOC4W120LWBL				Black	
LMPOC4W120LCWH	Cool White	5000 K		White	1
LMPOC4W120LCNI				Nickel	10
LMPOC4W120LCBL				Black	

Required product(s):

PRODUCT	DESCRIPTION
LMPOCPKT8BL	Pockit® 120-M starter power cord – Black
LMPOCPKT8WH	Pockit® 120-M starter power cord – White

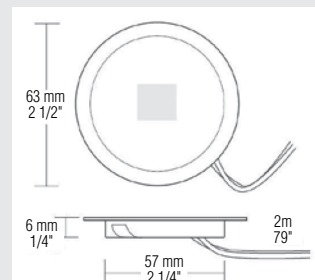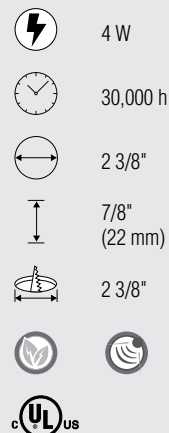

LED POCKIT® 120 V PUCK LIGHT STARTER POWER CORDS

True plug-and-play - no transformer or power supply required.

PRODUCT	VOLTAGE	LENGTH	FINISH	QTY/BOX
LMPOCPKT8BL	120 V	8' (2.44 m)	Black	1
LMPOCPKT8WH			White	



LEDDY LIGHTING SYSTEM

- A LED SmartLight that is wireless and adaptable to any place - No wires or electrician required
- Powered by Infinity, a powerful and rechargeable USB Lithium battery
- The extreme ease of installation allows Leddy to be operational in a few minutes
- Lighting systems aimed to minimize energy waste
- Easy surface or recessed mounted installation (spring mounting clips required for recessed mount, sold separately)

Specification(s):

- Number of LEDs: 12
- Master equipped with proximity sensor.
Duration of a single cycle: about 30 seconds
- Battery autonomy:
 - o With Infinity 6000 mA - around 3800 cycles
 - o With Infinity 3000 mA - around 1900 cycles



LEDDY MASTER

A LED SmartLight that is wireless and adaptable to any place.

- Master equipped with proximity sensor and crepuscular switch
- Touch on/off switch included with Master with touch function
- Perfect for countertops, work spaces, closets and furniture

Sold by unit

PRODUCT	DESCRIPTION	LIGHT	FINISH	QTY/BOX
4301122030	Leddy Master Move with proximity sensor	Warm White	White	10
4301124030		Neutral White		
4301124060			Brown	
4302122030	Leddy Master with touch function	Warm White	White	
4302124030		Neutral White		



1 W



8 1/8"
(205 mm)



7/8"
(22 mm)



3 1/16"
(78 mm)



Required product(s):

PRODUCT	DESCRIPTION
43013000	Infinity 3000 mAh rechargeable battery
43016000	Infinity 6000 mAh rechargeable battery

Suggested product(s):

PRODUCT	DESCRIPTION
4304124030	Leddy spring clips

LEDDY TELE MASTER BATTERY OPERATED EMERGENCY LIGHTING

- Master equipped with proximity sensor and crepuscular switch
- One USB key can turn on multiple devices
- Double housing sold separately #4305122030

Sold by unit

PRODUCT	LIGHT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
4303124030	Neutral White	8 1/16" (205 mm)	29/32" (23 mm)	3 1/16" (78 mm)	White	10



1 W




8 1/8"
(205 mm)



7/8"
(22 mm)



3 1/16"
(78 mm)



Required product(s):

PRODUCT	DESCRIPTION
43013000	Infinity 3000 mAh rechargeable battery
43016000	Infinity 6000 mAh rechargeable battery

Suggested product(s):

PRODUCT	DESCRIPTION
4304124030	Leddy spring clips
4305122030	Leddy double housing

LEDDY ESOUND PORTABLE AUDIO BLUETOOTH® SYSTEM

Innovative compact and portable sound module.


- Wireless connection to your tablet or smartphone, or PC via Bluetooth® technology
- Up to 10 hours of music, completely wireless
- Conveniently rechargeable via USB
- Merge the eSound module with the convenience of our Leddy's lighting line

Sold by unit

PRODUCT	LIGHT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
4303124030	Neutral White	7 29/32" (201 mm)	1 7/64" (28 mm)	2 61/64" (75 mm)	White	10

Suggested product(s):

PRODUCT	DESCRIPTION
4301122030	Leddy Master Move with proximity sensor
4302124030	Leddy Master with touch function
4303124030	Leddy Tele Master battery operated, emergency lighting
4304124030	Leddy spring clips
4305122030	Leddy double housing

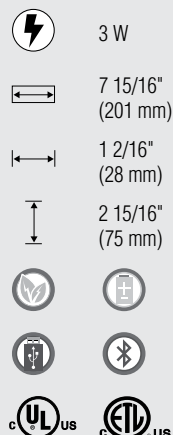


LEDDY DOUBLE HOUSING

Housing to add two Leddy Lights together. Housing is concealed behind a ceiling or wall, leaving only the Leddy lights exposed. Can be installed with high strength two-sided tape or screws.

Sold by unit

PRODUCT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
4305122030	14 3/8" (365 mm)	3" (75 mm)	3/4" (20 mm)	White	10



LEDDY SPRING CLIPS

Spring clips for recessed mounting Leddy lights (2-pack).

Sold by unit

PRODUCT	FINISH	QTY/BOX
4304124030	White	10



LEDDY

INFINITY BATTERY FOR LEDDY LIGHTING SYSTEM

Extremely powerful batteries in a very compact format and with minimum self-discharge of less than 1% per month.

- Easy to install and use thanks to the clever snap-in feature
- Quick charging from main supply or even on a computer via a micro-USB cable
- Battery autonomy : 3000mAh : around 1900 cycles
6000mAh : around 3800 cycles

Included: Micro-USB cable and wall charger

Sold by unit

PRODUCT	DESCRIPTION	VOLTAGE	FINISH	QTY/BOX
43013000	3000mAh	3.7 V DC	Black	10
43016000	6000mAh			

Required product(s):

PRODUCT	DESCRIPTION
4301122030	Leddy Master Move with proximity sensor or
4302124030	Leddy Master with touch function or
4303124030	Leddy Tele Master battery operated, emergency lighting



LED 12 V AND 24 V POWER SUPPLIES

Ideal for indoor LED lighting with Group G items like Vivo, Linea, tape light, and tape light roll.

- Additional power supply with multiple options for connecting to lights
- Maximum efficiency: 80%
- Universal AC input

Sold by unit

Included: 5.5 mm and 3.5 mm DC connector allowing connections to many different lights, 4' (1.22 m) power cord, 6' (1.83 m) secondary cord to connect to lights.

Sold by unit

PRODUCT	LIGHT	VOLTAGE	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
109246090	LED	12 V	4 27/32"	2 5/32"	1 11/32"	Black	50
109246030		24 V	(123 mm)	(55 mm)	(34 mm)	White	



60 W




4 7/8"
(123 mm)



2 1/8"
(55 mm)



1 3/8"
(34 mm)

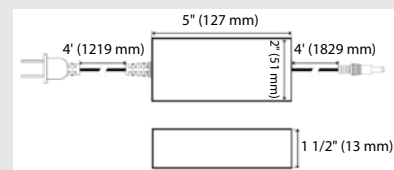

RECESSED PROFILE

A compact and recessed profile that makes the LED light source invisible.

The edges on each side of this extrusion allow for a recessed installation, while having understated style with its discreet and neat appearance.

- Designed for installation under cabinets or within furniture
- Customize your lengths as needed - profiles can be easily cut with a miter saw
- Easily accommodates Richelieu's Klipr system tape connectors within the profile

Included: One 8' (2.44 m) length aluminium profile with opal lens. Included opal lens creates the no-dot effect and gives a uniform look to the added lighting with no hot spots

PRODUCT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
30141300	8' (2.44 m)	3/4" (19.1 mm)	5/11" (11.4 mm)	Aluminum	1



60 W



8'
(2.44 m)





3/4"
(19 mm)



15/32"
(12 mm)



cUL US

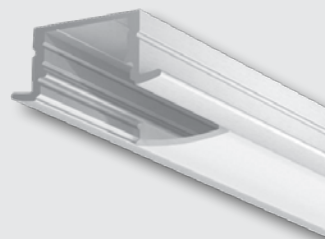

LED 24 V TAPE LIGHTS

Affordable LED tape light with high light output.

- Easy installation
- Cuttable at each 6 LED / 1 5/16" (33 mm)
- 14.4 W per meter
- Beam angle: 120°
- Luminous Flux for 16' roll 4724 lm
- Luminous Flux at 1 meter 944 lm
- Luminous Flux at 1 foot 288 lm
- Lumens: 180 LED SMD (3528 per meter)
- Improved luminous efficacy: 72 lumens/Watt

PRODUCT	LIGHT	KELVIN COLOR T°	LENGHT	FINISH	QTY/BOX
3014180124	Neutral White	4200 K	197" (5 m)	Unfinished	1
3014180122	Warm White	3000 K			



72 W per
roll of 5 m




16 3/8'
(5 m)



5/16"
(8 mm)



1/2"
(13 mm)

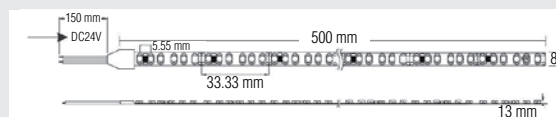

KLIPR LED TAPE DIRECT CONNECTORS

Easy system of connecting two tape lights together.

Easy do-it-yourself Klipr allows customers to make tape lights connections as needed.

PRODUCT	DESCRIPTION	FINISH	QTY/BOX
30140820	For non coated 8 mm IP22 tape	Black/Clear	1
30141021	For coated 10 mm IP65 tape		
30141040	For RGB 10 mm Tape Light		
30141049*	For RGB coated 10 mm tape light		
30141092**	For coated 10 mm IP65 tape light		
30141093**	For non coated 8 mm IP22 tape light		
30140208	8 mm, clips only		2
30141008	10 mm, clips only		10
30140265	8 mm, clips only		2
30141065	10 mm, clips only		10

*include 3.3' (1 m) wire per pack


**include 6.6' or 79' (2 m) wire per pack

Required product(s):

PRODUCT	DESCRIPTION
30149093	Klipr L and T connector 8 mm tape, 2 clips of each per pack
30149096	Klipr L and T connector 10 mm tape, 2 clips of each per pack



30149093

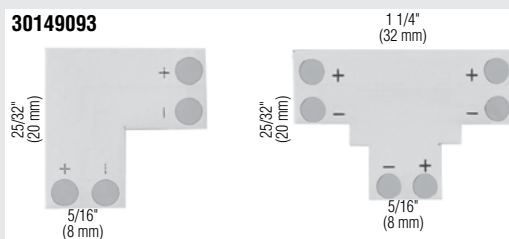

LED 12 V TAPE LIGHTS

High Output FlexTape has a low profile that can be used in many discreet locations.

- Sold in 16.4' (5 m) rolls - one roll uses 3 W of energy per foot
- Features diodes placed 5/16" (7 mm) apart for greater coverage and illumination
- Cuttable every 1" (25 mm)
- Low heat
- Maximum continuous run: 16.4' (5 m); maximum per power supply: 20' (6 m)
- Lumens: 149 per ft. (489 per meter)
- Improved luminous efficacy: 50 lumens/Watt

Application: Ideal in LED aluminum profiles for kitchens, furniture and displays

Included: Strong 300 LSE 3M™ adhesive backing.

PRODUCT	LIGHT	KELVIN COLOR T°	FINISH	QTY/BOX
LLEDFLXTPEBRHO	Blue	Not available	Unfinished	1
LLEDFLXTPECRHO3	Cool White	4800 K		
LLEDFLXTPEDRHO	Daylight	6500 K - 7000 K		
LLEDFLXTPERRHO	Red	Not available		
LLEDFLXTPEWRHO3	Warm White	2700 K		
LLEDFLXTPENRHO	Warm White	3500 K		

Required product(s):

PRODUCT	DESCRIPTION
LLEDTPEPKT2M	Starter lead cord
LLEDTPEPKT2MTEE	
LDCELT12CON	Commercial grade power supply
LDCELT18CON	
LDCELT60CON	



3 W
per foot



50,000 h



16'
(4.8 m)





3/8"
(10 mm)



2.3 mm



cUL US

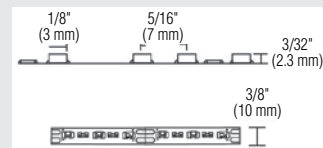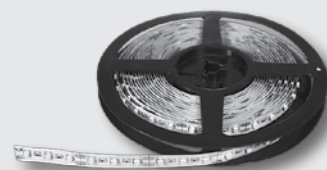

SMALLY 12 V LED PUCK LIGHTS

SMALLY integrates a special optic that appears neutral and uniform, even when the device is switched off.

- Easy and quick installation – no electrician required
- Plug & play quick-connect system allows the device to be easily disconnected and removed if necessary
- Recessed or surface mounted installation
 - Recessed: 2 1/4" (57 mm) hole with only a 15/32" (12 mm) depth
 - Surface-mount: 2 different style trim rings (round or angled 20°), sold separately
- No-dot effect LED technology - provides a uniform and diffused light projection
- IP44 configuration
- CRI (color rated index): 80
- Luminous Flux : 360 Lumen
- Works with the following dimming switch options
 - LED Touch Me dimmer (152125601)
 - LED Call Me switch(152127010)
 - LED CapSens Dimmer(152126003)

Application: Countertop lighting, cabinets, bookcases, displays, and as decorative lighting

Included: A 79" (2 m) quick connect cable to connect light to power supply

Sold by unit



PRODUCT	LIGHT	KELVIN COLOR T°	FINISH	QTY/BOX
153122010	Warm White	3000 K	Aluminum	20
153122100			Gray	
153122030			White	
153124010	Neutral White	4300 K	Aluminum	
153124100			Gray	
153124030			White	



3 W



2 1/4"
(57 mm)

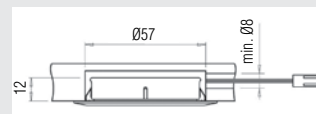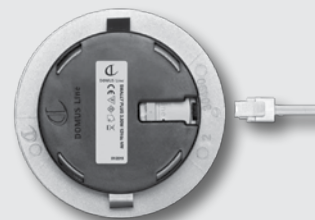

SMALLY LED TRIM RINGS

Sold by unit

PRODUCT	DESCRIPTION	HEIGHT	FINISH	QTY/BOX
15312010	Round surface-mount trim ring	3/4" (19 mm)	Aluminum	20
15312100			Gray	
15312030			White	
15314010	Angled 20° round surface-mount trim ring	1 15/32" (37 mm)	Aluminum	
15314100			Gray	
15314030			White	




SMALLY LIGHT REPLACEMENT CORD

Inventoried part for Smally light 153122010 and 153124010. Smally light sold separately. Replacement part for the cable from the light to the power supply.

Included: Includes only the 79" (2 m) power cord that connects the light to the power supply

Sold by unit

PRODUCT	LENGTH	FINISH	QTY/BOX
15312079	79" (2 m)	White	20



LED PAR 20 RECESSED CEILING LIGHTS

Recessed ceiling lighting for insulated or non-insulated ceilings or vanity lighting.

Specification(s):

- 630 lumens
- Maximum height:
4 1/2" (114 mm) fits perfecting in
standard 6" (152 mm) ceilings
- CRI 80

- Quick connect feature
- 15° swivel feature to direct light where needed
- Average 22.8 years life based on a 3 hour day usage
- Dimmable

Included: Recessed ceiling light (1 pc), trim ring (1 pc) and LED bulb (1 pc),
17 W bulb equivalent to 65 W Warm White

PRODUCT	LIGHT	KELVIN COLOR T°	FINISH	QTY/BOX
1012378195	Warm White	3000 K	Brushed Nickel	1
10123780RB			Oil-Rubbed Bronze	
1012378030			White	



7 W





7 1/2"
(191 mm)



4 1/8"
(105 mm)



4 1/2"
(114 mm)

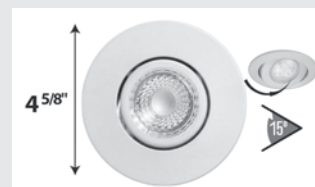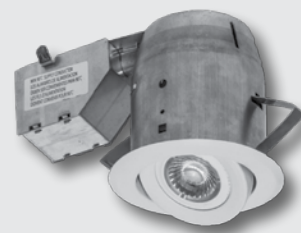

LUMI FLEX PROFILE

This unique and innovative aluminum profile is completely flexible.
Now allowing for even great flexibility in your lighting designs.

- Easy installation - surface mounted installation using double-sided tape or mounting brackets
- Easy bend, no special tools required
- Compatible with LED strips up to 15/32" (12 mm) wide
- Profile that allows the integration of linear LED lighting on curved or uneven surfaces
- Included opal lens provides a diffused light effect without harsh dots (no dot effect)
- Aluminum profiles act as a heat sink for LED tape lights

Application: Cabinets, displays, bar and table lighting, counter lighting, arched doorways
or entryways

Included: Flexible 8' (2.44 m) opal lens included with profile

PRODUCT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
30145560	8' (2.44 m)	23/32" (18 mm)	3/16" (5 mm)	Aluminum	1



3 W




8'
(2.44 m)



6/8"
(18 mm)



3/16"
(5 mm)





4-PORT USB 2.0 HUB WITH CABLE

Ideal for individual desks, this elegant desktop grommet will power and charge 2.0 compatible devices.

- Connects up to 4 USB 2.0 compatible devices simultaneously (40 times faster than USB 1.1)
- The circuit current is 500mA per USB port
- Powered from computer USB, compact design for easy portability and use

Sold by unit

PRODUCT	UPC	FINISH	QTY/BOX
71881040100	No	Silver	280
BP71881040100	Yes	Silver	60

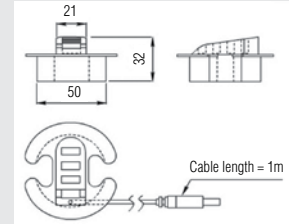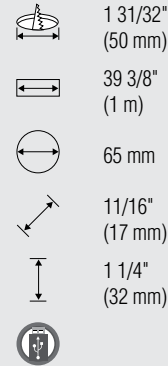

44° ANGLE WOOD PROFILES

Angled profile allows for perfect illumination of cabinet interiors exactly where needed.

- 44° sides for a snug fit in imperfect corners
- Back clearance allows for passing and concealing the electrical wiring
- No sanding required - easy to paint or stain




Application: Ideal for indoor linear LED lighting such as cabinet interiors, surfaces, corners

Sold by unit

PRODUCT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
30144099005	8' (2.44 m)	1 1/2" (38 mm)	1/2" (13 mm)	Unfinished	1
30144099035		1" (25 mm)	5/16" (8 mm)		

Suggested product(s):



PRODUCT	DESCRIPTION
1701220012	LED 120 V direct plug linear light - 3000 K
1701240012	LED 120 V direct plug linear light - 4200 K

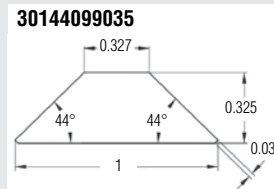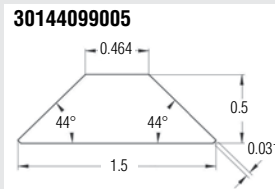

INFINEX EXTRUSION ALUMINUM PROFILE

Innovative cut to size 12 V LED aluminum extrusion system designed for easy DIY application.

- Recessed or surface mounted installation
- Available in 5 different shapes : angle, curve, rectangle, round and square
- FlexTape slides into proprietary power feed end cap.



Important: Diffusers are not included.

PRODUCT	SHAPE	HEIGHT	LENGHT	VOLTAGE	FUNCTION	FINISH	QTY/BOX
LXANG72SC10	Angle	9/16" (14 mm)	72" (1829 mm)	12 V	Surface	Satin Clear	1
LXANG72WH		1 1/8" (29 mm)				White	
LXCRV72BL	Curve	1/2" (13 mm)			Surface	Black	
LXCRV72SC10						Satin Clear	
LXCRV72WH						White	
LXREC72SC10	Rectangle	5/16" (8 mm)			Recessed	Satin Clear	
LXREC72BL		5/16" (8 mm)			Recessed	Black	
LXRND72BL	Round	6/8" (18 mm)			Surface	Black	
LXRND72SC10		11/16" (17 mm)				Satin Clear	
LXSQR72BL	Square	15/32" (12 mm)			Surface	Black	
LXFL72SC		7/16" (11 mm)			Recessed	Milk	
LXSQR72SC10		1/2" (13 mm)			Surface	Satin Clear	
LXSQR72WH		15/32" (12 mm)				White	

New!

Required product(s):

PRODUCT	DESCRIPTION
LX72DIFFMLK	Infinex Diffuser (milk finish)
LX72DIFFFR10	Infinex Diffuser (frosted finish)
LX72DIFFCL10	Infinex Diffuser (clear finish)

REPLACEMENT LENS FOR 45° CORNER PROFILE (30142000)

Designed to give a uniform light without hot spots with an opal lens and a high output tape light.

- Fast and easy installation due to snap-in feature
- Transmits 65% of the original light output from the LED source
- 100% diffusion
- Opal lens was specifically developed to create a ghost effect lighting; soft and clean with no dot effect
- Sold in 8' (2.44 m) lengths – cut to size needed

Important: Profile for LED Tape Light (30142010), power supply and other accessories are sold separately.

PRODUCT	LENGHT	QTY/BOX
30142000	8' (2.44 m)	1

Required product(s):

PRODUCT	DESCRIPTION
30142010	45° corner profile for LED tape light



ASHLEY™ POWER AND CHARGING SOLUTIONS

The Ashley features outlets that deliver AC power for high-power devices, two innovative USB ports, and an HDMI port.

Each USB port utilizes a Smart Device Recognition Chip to monitor and independently deliver the required amperage to your devices (up to 2.1 amps each) and charges them in half the time it takes with similar products on the market.

- Easy surface mounted installation with included thin mounting bracket
- Outlets and USB ports are integrated within a single piece cover, resulting in fewer edges and a cleaner aesthetic
- Durable metal frame

Application: Desktop and office space

PRODUCT	DESCRIPTION	FINISH	QTY/BOX
305125090	Ashley Uno™ - 1 outlet, 2 USB ports	Black	1
305125030		White	
305093090	Ashley Duo™ - 2 outlets, 2 USB ports	Black	
305093030		White	
305053090	Ashley Trio™ - 3 outlet, 2 USB ports, 1 HDMI port	Black	
305053930		White	



RECESSED POWER HARNESS

Keep your electronic devices charged and ready for use with this two outlet and two USB surface mounted power harness.

- Easy recessed installation
- 2 outlet power bar with 90° plug 2 x USB, RJ11 and RJ45 connection



Included: 10' (3.05 m) power cord with 90° plug, 6 1/2" (165 mm) RJ11 & RJ45 cable

Application: Perfect for use in residential applications such as bedrooms and home offices and in commercial applications such as hotels, airports, restaurants and cafes, salons, office cubicles.

PRODUCT	VOLTAGE	FINISH	QTY/BOX
4322290	125 V	Black	1

Suggested product(s):

PRODUCT	DESCRIPTION
100422090	Surface power station
718813090	Wireless drawer charger



ROUND POWER GROMMET


USB device that offers charging capabilities to get your electronic devices up and running.

- Easy installation
- Double USB outlet recessed in desk grommet kit
- Compatible with a wide range of electronic devices

Included: Double 5V 2100mA USB UL approved plug in adapter included

Application: Perfect for use in residential applications such as bedrooms and home offices and in commercial applications such as hotels, airports, restaurants and cafes, salons, office cubicles.

PRODUCT	FINISH	QTY/BOX
7188100090	Black	1

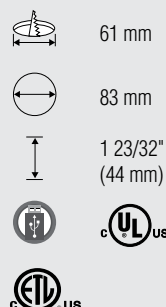

RICHELIEU POWER STATION WITH HDMI


Rounded edges and unique silver finish with matte black insert matches our Perno and Prime task lights.

- Easy installation
- Power station has 3 grounded outlets, 1 USB 2.0 port and 1 HDMI port
- USB 2.0 port can be used as a power source or for rapid data transfer

Included: 8' (2.44 m) grounded 14 AWG power cord

Application: Ideal for freeing clutter from busy individual desks, workstations, or conference tables.

PRODUCT	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
201314H090	10 3/8"	4 1/4"	2 5/8"	Black	1
201314H100	(263.5 mm)	(107.9 mm)	(66.7 mm)	Black, Silver	

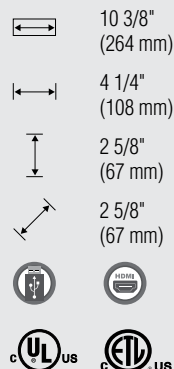

24 V POWER SUPPLIES

Power supplies for new 24 V systems.

- The same power supply operates all LEDs
- Dimmable - dimming occurs on low voltage side with prescribed dimmers
- Indoor use only

Application: Kitchens, living rooms, bedrooms, inside cabinets, under cabinets and under shelves.

Important: To be used only with our exclusive 24 V lighting products



Included: 79" (2 m) power cord, 20" (508 mm) secondary cord with terminal block for quick connect to 24 V lights

Sold by unit

PRODUCT	WATTS	LENGTH	WIDTH	HEIGHT	FINISH	QTY/BOX
52406	6 W	2 5/16" (59 mm)	1 3/8" (35 mm)	25/32" (20 mm)	White	20
52430	30 W	5 15/16" (151 mm)	1 5/8" (41 mm)	1 1/4" (32 mm)		
52475	75 W	7 5/16" (186 mm)	2 3/8" (60 mm)			


Required product(s):

PRODUCT	DESCRIPTION
126122195	ATOM 24 V LED puck lights
127124170	K-PAD Touch 24 V LED flat panel lights
129122170	K-PAD IR (infrared) 24 V LED flat panel lights

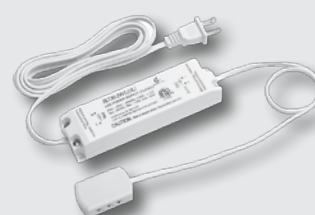

LED DIMMABLE HARDWIRE 12 V AND 24 V POWER SUPPLIES

Dimmable LED power supply with power cord for plug-in option or hardwire option.

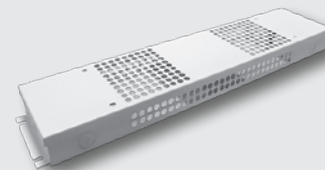

- White junction box ideal for use with our Group A lighting products in conjunction with our Leviton wall dimmers
- LED power supply preinstalled in the junction box
- Knockouts available at required input and output locations for hardwire option
- Two maximum wattage options to choose from to complete any design
- Short circuit/over voltage protections

Included:

- 1 Group A terminal block for quick connection of lights to power supply
- 4' (102 mm) primary cord with terminal to connect lighting to power supply
- 1 Standard wall plug for easy installation option
- 1 Integrated junction box for hardwire installation

Application: General lighting in rooms or offices, surface and counter lighting, inside and outside lighting of showcases, displays, and cabinets, shelves backlighting, etc.) and ambience lighting.

PRODUCT	WATTS	VOLTAGE	LENGTH	FINISH	QTY/BOX
30141225	25 W	12 V	13 3/4" (349 mm)	White	1
30141250	50 W				
30142450	50 W	24 V	13 3/4" (349 mm)	White	1
30142496	96 W				
			15" (381 mm)	Black	1

ALUMINUM PROFILE END CAPS

- Fit flush to the profile edges
- Aluminum finish adds an aesthetic accent to the profiles

Sold by pair (bag containing right and left)



PRODUCT	DESCRIPTION	HEIGHT	LENGTH	FINISH	QTY/BOX
30147852	End caps for closet rod profile (30147850)	1/8" (3 mm)	1 15/16" (33 mm)	Aluminum	100 pairs
30141122	End caps for low aluminium profile with lens (30141100)	1/4" (7 mm)	3/4" (19 mm)		
30141304	End caps for 45° Corner Profile (30142010)	1/2" (13 mm)	15/16" (24 mm)		
30141654	End caps for interior cabinet profile (30141650)	1" (25 mm)	1 15/16" (37 mm)		
30142070	End caps for 45° Corner Profile (30142010)	25/32" (20 mm)	25/32" (20 mm)		
30145354	End caps for 5/8" recessed aluminum Profile (30145350)	3/8" (10 mm)	15/16" (24 mm)		1 pairs
4107210	End caps for Splitty profile (41071096)	9/16" (14 mm)	1" (25 mm)		20 pairs
4107701	End caps for Icy profile (41079096)	29/32" (23 mm)	1" (25 mm)		

LED PAR 20 7 W REPLACEMENT BULB

- LED PAR20 replacement bulb works with our PAR20 recessed ceiling lighting
- LED light bulbs that once installed have a almost perfect similarity with the traditional look of Halogen
- Energy Star rated

Specifications:

- 630 lumens
- E26 base
- 40° beam angle
- 10% - 100% dimming range
- Tested at -40°
- CRI80/120



7 W



25,000 h



PRODUCT	LIGHT	KELVIN COLOR T°	QTY/BOX
1012378122	Warm White	3000 K	1

NOTES