



# SPECIALTY SCREWS

NO PRE-DRILLING  
FOR A PERFECT FINISH

TODAY'S SOLUTION  
FOR TOMORROW'S  
STANDARDS



## YOUR PROJECTS DESERVE PWR DRIVE!

**PWRDRIVE** is a new line of specialized screws designed to provide exceptional, consistent performance, faster installation and enhanced assembly speed.

- Zinc-plated steel for durability and strength
- Coarse thread, sharp point for smooth and easy penetration into material
- Once again, we are revolutionizing the market by providing our customers with the most innovative fastening and assembly solutions.

### Applications

Suitable for all types of wood, MDF, plywood and particleboard.




# HYBRIDE *The ultimate assembly screw in the industry!*

High-quality assembly screws designed for powerful drilling and holding power.



**Flat head with nibs**  
6 countersinking nib  
provides a perfect finish

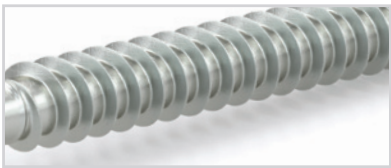

**Non-greasy wax coating**  
High quality lubricant that  
prevents wood from splitting



**#2 square drive**  
Faster drilling, excellent stick-fit  
and cam-out resistance



**Self-drilling TEK® point**  
Allows for easy and clean drilling

Screw size #7	Length	Qty/Box
FKWNTZ71PPR	1" (25 mm)	10 000
FKWNTZ71PRM1	1" (25 mm)	1000
FKWNTZ7118PPR	1 1/8" (29 mm)	8000
FKWNTZ7118PRM1	1 1/8" (29 mm)	1000
FKWNTZ7114PPR	1 1/4" (32 mm)	7500
FKWNTZ7114PRM1	1 1/4" (32 mm)	1000
FKWNTZ7112PPR	1 1/2" (38 mm)	5000
FKWNTZ7112PRM1	1 1/2" (38 mm)	1000
FKWNTZ7134PPR	1 3/4" (44 mm)	4000
FKWNTZ7134PRM1	1 3/4" (44 mm)	1000
FKWNTZ72PPR	2" (51 mm)	3500
FKWNTZ72PRM1	2" (51 mm)	1000

## PREVENTS WOOD FROM SPLITTING



Without Hybride



With Hybride



## **CAB** *The cabinet installation screw with superior holding power!*

Features a self-tapping head which enables it to sit perfectly flush with the surface. The perfect fit for Fastcap's peel and stick 9/16" (14 mm) screw cover caps.



**Oversized flat head with nibs**  
Provides 4 times the holding power




**#2 square drive**  
Faster drilling, excellent stick-fit and cam-out resistance

### AVAILABLE IN 3 FINISHES



Zinc      White      Black

### AVAILABLE IN 2 POINT TYPES

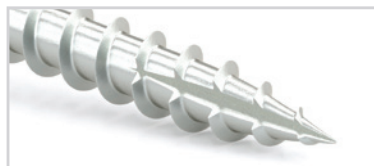

**Self-drilling type 17 point**  
No pre-drilling required for increased installation speed



**Self-drilling TEK® point**  
Allows for easy and clean drilling

Screw size #10	Length	Qty/Box	Finish	Type of point
FTKNC17W10118HP	1 1/8" (29 mm)	1 800	White	17
FTKNC17W10118R	1 1/8" (29 mm)	200	White	17
FTKNC17Z10118	1 1/8" (29 mm)	2000	Zinc	17
FTKNC17Z10118CT	1 1/8" (29 mm)	200	Zinc	17
FTKNC17Z10118HP	1 1/8" (29 mm)	1800	Zinc	17
FTKNC17Z10114	1 1/4" (32 mm)	2000	Zinc	17
FTKNC17Z10114CT	1 1/4" (32 mm)	200	Zinc	17
FTKNC17Z10114HP	1 1/4" (32 mm)	1500	Zinc	17
FTKNC17Z10112	1 1/2" (38 mm)	2000	Zinc	17
FTKNC17Z10112CT	1 1/2" (38 mm)	200	Zinc	17
FTKNC17Z10112HP	1 1/2" (38 mm)	1250	Zinc	17
FTKNC17Z10134	1 3/4" (44 mm)	2000	Zinc	17
FTKNC17Z10134CT	1 3/4" (44 mm)	200	Zinc	17
FTKNC17Z10134HP	1 3/4" (44 mm)	1000	Zinc	17
FTKNC17Z102	2" (51 mm)	1500	Zinc	17
FTKNC17Z102CT	2" (51 mm)	200	Zinc	17
FTKNC17Z102HPR	2" (51 mm)	900	Zinc	17
FTKNC17Z102P	2" (51 mm)	2000	Zinc	TEK®
FTKNC17Z102R	2" (51 mm)	200	Zinc	TEK®
FTKNC17BP10212P	2 1/2" (64 mm)	1250	Black	17
FTKNC17BP10212R	2 1/2" (64 mm)	200	Black	17
FTKNC17W10212P	2 1/2" (64 mm)	1250	White	17
FTKNC17W10212R	2 1/2" (64 mm)	200	White	17
FTKNC17Z10212	2 1/2" (64 mm)	1500	Zinc	17
FTKNC17Z10212CT	2 1/2" (64 mm)	200	Zinc	17
FTKNC17Z10212HP	2 1/2" (64 mm)	600	Zinc	17
FTKNC17BP103P	3" (76 mm)	1000	Black	17
FTKNC17BP103R	3" (76 mm)	200	Black	17
FTKNC17W103P	3" (76 mm)	1000	White	17
FTKNC17W103R	3" (76 mm)	200	White	17
FTKNC17Z103	3" (76 mm)	1500	Zinc	17
FTKNC17Z103CT	3" (76 mm)	200	Zinc	17
FTKNC17Z103HPR	3" (76 mm)	400	Zinc	17
FTKNC17Z103P	3" (76 mm)	1000	Zinc	TEK®
FTKNC17Z103R	3" (76 mm)	200	Zinc	TEK®
FTKNC17Z104	4" (102 mm)	1000	Zinc	17
FTKNC17Z104CT	4" (102 mm)	200	Zinc	17
FTKNC17Z104HPR	4" (102 mm)	325	Zinc	17
FTKNC17Z105	5" (127 mm)	1000	Zinc	17
FTKNC17Z105CT	5" (127 mm)	200	Zinc	17
FTKNC17Z105HPR	5" (127 mm)	300	Zinc	17



# WMX PREMIUM *The best wood screw for increased assembly speed!*

Designed for durability, strength and smooth performance. This screw features a self-tapping, high-low thread that provides improved and faster installation.



Available in 3 different screw sizes




**Flat head with nubs**  
4 countersinking nubs provide a fluid finish



**Non-greasy wax coating**  
High quality lubricant that prevents wood from splitting



**#2 square drive**  
Faster drilling, excellent stick-fit and cam-out resistance

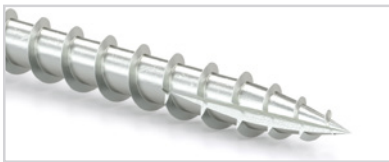

**Self-drilling type 17 point**  
No pre-drilling required for increased installation speed

Screw size #6	Length	Qty/Box
FK2C17Z612PPR	1/2" (13 mm)	15 000
FK2C17Z612PRM1	1/2" (13 mm)	1000
FK2C17Z658HPPR	5/8" (16 mm)	12 000
FK2C17Z658PRM1	5/8" (16 mm)	1000
FK2C17Z634PPR	3/4" (19 mm)	15 000
FK2C17Z634PRM1	3/4" (19 mm)	1000
FK2NC17Z61PPR	1" (25 mm)	10 000
FK2NC17Z61PRM1	1" (25 mm)	1000
FK2NC17Z6114PPR	1 1/4" (32 mm)	8000
FK2NC17Z6114PRM1	1 1/4" (32 mm)	1000
FK2NC17Z6112PPR	1 1/2" (38 mm)	7000
FK2NC17Z6112PRM1	1 1/2" (38 mm)	1000
FK2NC17Z6134PPR	1 3/4" (44 mm)	5000
FK2NC17Z6134PRM1	1 3/4" (44 mm)	1000
FK2NC17Z62PPR	2" (51 mm)	4000
FK2NC17Z62PRM1	2" (51 mm)	1000

Screw size #7	Length	Qty/Box
FK2C17Z758HPPR	5/8" (16 mm)	12 000
FK2C17Z758PRM1	5/8" (16 mm)	1000
FK2C17Z734PPR	3/4" (19 mm)	15000
FK2C17Z734PRM1	3/4" (19 mm)	1000

Screw size #10	Length	Qty/Box
FKNC17Z103PPR	3" (76 mm)	1500
FKNC17Z10312PPR	3 1/2" (77 mm)	1000
FKNC17Z104PPR	4" (102 mm)	1000

