



SMART HOME
TECHNOLOGY



Product image
(see installation next page)



Description

Libero 3.0 is a SMART "hands-free" electronic cabinet door opener. Mainly used with our popular side mounted waste management systems like SE and Euro Cargos.

An integrated LED light indicates the new laser-sensor position in the plinth area. Simply lift your foot towards the light and the door or drawer will open fully. The device can also be voice activate (compatible with AMAZON'S ALEXA only).

It has never been as easy to dispose of the waste!



Application

Base cabinets with no frame on the bottom, and equipped with top mount waste bins. Can also be used for bottom deep drawers. Mainly in kitchen application




Product features

- Offers 2 opening options: **a)** With foot, by activating the "laser-sensor" in the "toe-kick" area or **b)** by voice command through Amazon's ALEXA.
- No unintended opening.
- For base cabinets from 300mm to 600mm (12" to 24") wide, equipped with top-mount hang-thru wastebins like Eurocargo, SE-cargo (3614,4614,4719 series..).
- Mounts in the bottom-front section of the base cabinet (not adapted for framed cabinets).
- Can be retrofitted.
- Low voltage device, 5V, 2A input, with USB-C socket.
- Power-supply by electrical driver for 110 V to 230 V outlets, with 2m USB-C / USB cable and international adapters (all included in the set).
- Integrated location LED lighting, may be dimmed or switched off through web browser.
- Push-out force and laser sensitivity can also be adjusted via web settings.
- Intelligent control, identifies obstacles thanks to friction clutch system.
- Splash water-proof according to IP 21 certification
- UL, CSA certified.
- Extension will vary depending on weight of content and width of the cabinet.
- Can be used with most common bottom drawers but application shouldn't exceed 40kg (88lbs) and 900mm (36") wide cabinet application.

No.	Description	Product Dimensions L x P x H
36973100	SMART ELECTRONIC DOOR OPENER GREY	157mm x 300mm x 33mm 6 1/8" x 11 3/4" x 1 1/4"

Technical Information

A simple opening to be made in the cabinet bottom allows to easily install the system with only 4 screws. No other brackets required.

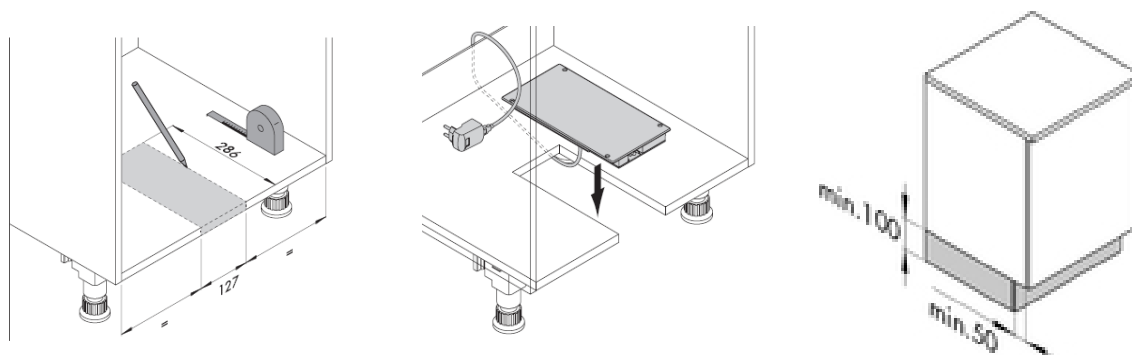

System settings such as on/off light, brightness and opening force can be adjusted via web browser. Follow QR Code below for configuration details.

