Fitting for 2 symmetrically opening wooden doors up to 80 kg (176 lbs.), with surface mounted running track. Ceiling mounting.

Product highlights

Flexibility Door openings up to 2400 mm (7'10 1/2") possible

Aesthetics Symmetrical solutions without visible guide

Technical specifications

Max. 80 kg (176 lbs.)


↑ Max. 4000 mm (13'1 15/32")

← 500-1200 mm (1'7 11/16" to 3'11 1/4")

↑ 35-80 mm (1 3/8" to 3 5/32")



Installation examples

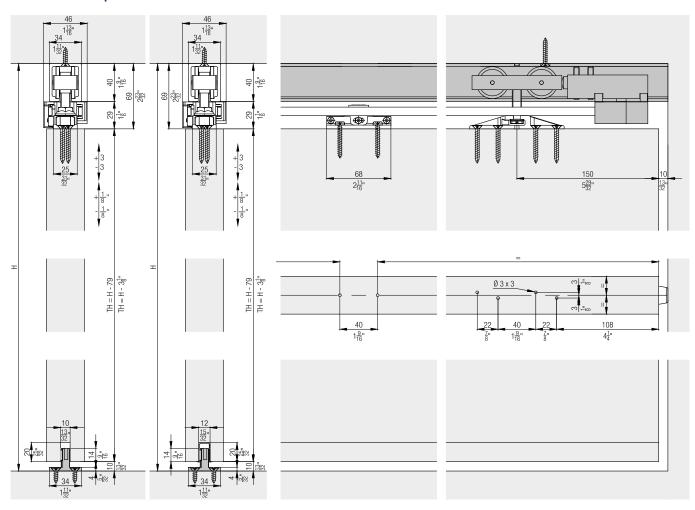

Set for 2 wooden doors up to 80 kg (176 lbs.)

	No.
Hawa Junior 80 Z Symmetric, for 2 doors	20661
Hawa Junior 80 Z Symmetric, partial set	20662

riawa bunioi 60 2 Symmetric, partiai set		20002		
Set consisting of:		20662	No.	
	Running gear, 2-wheeled, M10, plastic wheels	4		10407
	Two-way suspension flange, with screw M10 and fixing screws, steel, zinc-plated	4		10489
	Bottom guide, zero tolerance, groove width 10 mm (13/32"), plastic black	2		14427
	Stopper Hawa Junior 80/100, with adjustable retention spring	1		30138
	Guide pulley wheel matching with running track Hawa Junior 80	2	2	20653
	Toothed belt lock for manual systems	1	1	20352
To to	Driver, laterally adjustable for manual systems	1	1	20353
	Toothed belt, 10 m, fibre glass reinforced, black	1	1	19668
1	Screw-on rubber door stop	2		10629
	Vertical adjustment pin	1		10795

Running tracks

	mm (inch)	No.
Running track, aluminum, anodized, pre-drilled	1,400 (4' 7 1/8 '')	10189
	1,600 (5' 3 '')	10190
	1,800 (5' 10 7/8 '')	10191
	2,000 (6' 6 3/4 '')	10192
	2,200 (7' 2 5/8 '')	10193
	2,500 (8' 2 7/16'')	10194
	3,000	18532
	4,000 (13' 1 15/32'')	18533
	6,000 (19' 8 7/32'')	10186
	cut to size	10188

Guide tracks

	mm (inch)	No.
Guide track, for groove mounting, plastic, 10-piece set	1,300 (4' 3 3/16'')	14540

Accessories

	No.
Bottom door stopper, with centering, stainless steel look	21473
Bottom door stopper, with centering, chrome-plated, matt	20773

Toothed belt

The length of the toothed belt is calculated for 2 sliding doors with a maximum width of 1200 mm (3'11 1/4") each.

Accessories

- Hawa Junior bottom guides for wall mounting from page 476
- Lock solutions from page 479
- General accessories from page 487

Planning/execution

Further information about the product can be found on www.hawa.com.